

POWER TRANSFORMER MOUNT: WORLD SERIES

VPP16-150

Electrical Specifications (@25C)


1. Maximum Power: 2.5VA

2. Input: Series: 230VAC, 50/60Hz; Parallel: 115VAC, 50/60Hz 3. Output: Series1: 16.0V CT@ 0.15A; Parallel2: 8.0V @ 0.3A

4. Voltage Regulation: 25% TYP @ full load to no load 5. Temperature Rise: 30C TYP (45C MAX allowed)

Insulation Resistance: 100MΩ

7. Hipot: 4000VAC between primary to secondary and windings to core.



Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

Safety:

Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:











Agency File:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose.

UL: File E65390, UL 5085-1 and 3 (formerly UL1585), Class 2/3.

CSA: File LR 221330, C22.2 NO. 66, General Purpose.

TUV: File R72182067, EN 61558-1:2005+A1, EN61558-2-6:2009. Double Insulated. Non-inherently

Short-Circuit-Proof.

| A. Dimensions: | | | | | | | Units: In inches | |
|----------------|-------|-------|-------|-------|-------|-------|------------------|--|
| А | В | С | D | E | F | G | Н | |
| 1.062 | 1.125 | 0.187 | 0.200 | 0.250 | 1.312 | 1.625 | 1.000 | |

B. PIN DIM.: 0.025 SQ C. WT Lbs.: 0.25

D. Mounting Holes: 0.112 dia. x 2.0


Connections³:

Input: Series - Pin 1 to Pin 6, Jumper Pin 4 to Pin 3


Parallel - Pin 1 to Pin 6, Jumper Pin 1 to Pin 4 and Pin 3 to Pin 6

Output: Series – Pin 7 to Pin 12, Jumper Pin 9 to Pin 10

Parallel – Pin 7 to Pin 12, Jumper Pin 7 to Pin 10 and Pin 9 to Pin 12




* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



² Inherently limited. No fusing required. Class 2.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571

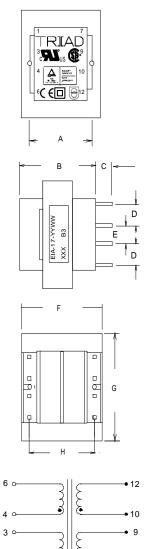

SCHEMATIC

Publish Date: August 25, 2021

³ Primary and secondary windings are designed to be connected in series or parallel. Windings are not intended to be used independently.