

June 2015

Multilayer Band Pass Filter

For 2400-2500MHz

DEA202450BT-2114F1

2.0x1.25mm [EIA 0805]*

* Dimensions Code JIS[EIA]



The products in this catalog will be or have been stopped production

Discontinue Issue Date	Jun. 3, 2022	
Last Purchase Order Date	Mar. 31, 2023	
Last Shipment Date	Mar. 31, 2024	

Please refer to our Web site about replacement information.




Multilayer Band Pass Filter


For 2400-2500MHz

Conformity to RoHS Directive

DEA202450BT-2114F1

SHAPES AND DIMENSIONS






Terminal functions
1 IN
2 GND
3 OUT

Dimensions in mm

RECOMMENDED LAND PATTERN



■EVALUATION BOARD



Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA202450BT-2114F1

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion Loss (dD)	2400 to 2500	_		2.5
Insertion Loss (dB)	2400 to 2500	_	-/	2.8 (-40 to +85°C)
Return Loss (dB)	2400 to 2500	10	/	//-
	824 to 849	30	_	
	880 to 915	30		_
	1545 to 1605	30	_	_
	1710 to 1785	34	_	_
	1850 to 1910	37	- 0	_
Attanuation (dD)	1920 to 1980	30		_
Attenuation (dB)	3168 to 3300	7	-	_
	3300 to 3800	11		_
	3800 to 4752	7	7	_
	4800 to 4967	33		_
	5150 to 6000	26		
	7200 to 7450.5	22		
Characteristic Impedance (Ω)			50 (Nominal)	

[•] Ta: +25±5°C

■TEMPERATURE RANGE


Storage temperature
(°C)
-40 to +85


- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.

DEA202450BT-2114F1


■ FREQUENCY CHARACTERISTICS

□INSERTION LOSS



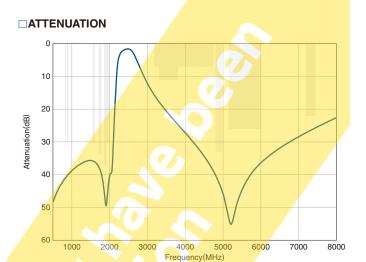


RETURN LOSS



[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

■ RECOMMENDED REFLOW PROFILE

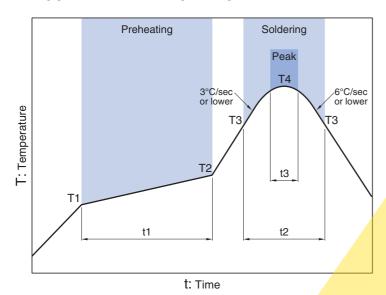

Preheating			Soldering			
		Critical zone (T3 to T4)		Peak		
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	Т3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120s	sec 240 to 260°C	30sec max.

*t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.