











#### SN54HC595, SN74HC595

SCLS041I-DECEMBER 1982-REVISED SEPTEMBER 2015

# SNx4HC595 8-Bit Shift Registers With 3-State Output Registers

#### **Features**

- 8-Bit Serial-In, Parallel-Out Shift
- Wide Operating Voltage Range of 2 V to 6 V
- High-Current 3-State Outputs Can Drive Up to 15 LSTTL Loads
- Low Power Consumption: 80-µA (Maximum) I<sub>CC</sub>
- $t_{pd} = 13 \text{ ns (Typical)}$
- ±6-mA Output Drive at 5 V
- Low Input Current: 1 µA (Maximum)
- Shift Register Has Direct Clear
- On Products Compliant to MIL-PRF-38535, All Parameters Are Tested Unless Otherwise Noted. On All Other Products, Production Processing Does Not Necessarily Include Testing of All Parameters.

## **Applications**

- **Network Switches**
- Power Infrastructure
- LED Displays
- Servers

## 3 Description


The SNx4HC595 devices contain an 8-bit, serial-in, parallel-out shift register that feeds an 8-bit D-type storage register. The storage register has parallel 3state outputs. Separate clocks are provided for both the shift and storage register. The shift register has a direct overriding clear (SRCLR) input, serial (SER) input, and serial outputs for cascading. When the output-enable (OE) input is high, the outputs are in the high-impedance state.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
SN54HC595	LCCC (20)	8.89 mm x 8.89 mm
3N34HC393	CDIP (16)	21.34 mm x 6.92 mm
	PDIP (16)	19.31 mm × 6.35 mm
	SOIC (16)	9.90 mm x 3.90 mm
SN74HC595	SOIC (16)	10.30 mm x 7.50 mm
	SSOP (16)	6.20 mm x 5.30 mm
	TSSOP (16)	5.00 mm x 4.40 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

## Logic Diagram (Positive Logic)

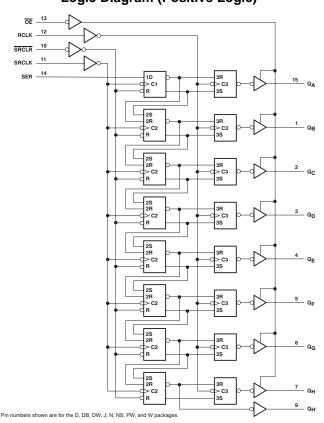



#### **Table of Contents**

1	Foatures		9.2 Functional Block Diagram	12
-	Features 1			
2	Applications 1		9.3 Feature Description	
3	Description 1		9.4 Device Functional Modes	13
4	Revision History2	10	Application and Implementation	14
5	Device Comparison Table 3		10.1 Application Information	14
6	Pin Configuration and Functions 4		10.2 Typical Application	14
7	Specifications	11	Power Supply Recommendations	16
•	7.1 Absolute Maximum Ratings	12	Layout	16
	7.1 Absolute Maximum Ratings		12.1 Layout Guidelines	16
	7.3 Recommended Operating Conditions		12.2 Layout Example	16
	7.4 Thermal Information	13	Device and Documentation Support	
	7.5 Electrical Characteristics 6		13.1 Documentation Support	
	7.6 Timing Requirements		13.2 Related Links	
	7.7 Switching Characteristics 9		13.3 Community Resources	17
	7.8 Operating Characteristics		13.4 Trademarks	17
	7.9 Typical Characteristics		13.5 Electrostatic Discharge Caution	17
8	Parameter Measurement Information		13.6 Glossary	17
_		14	Mechanical, Packaging, and Orderable	
9	Detailed Description 12		Information	17
	9.1 Overview 12			

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

#### Changes from Revision H (November 2009) to Revision I

Page

Added Applications section, Device Information table, Pin Configuration and Functions section, ESD Ratings table,
 Thermal Information table, Feature Description section, Device Functional Modes, Application and Implementation
 section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and
 Mechanical, Packaging, and Orderable Information section
 Deleted Ordering Information table.

Submit Documentation Feedback

Copyright © 1982–2015, Texas Instruments Incorporated




## 5 Device Comparison Table


PART NUMBER	PACKAGE	BODY SIZE (NOM)
SN54HC595FK	LCCC (20)	8.89 mm x 8.89 mm
SN54HC595J	CDIP (16)	21.34 mm x 6.92 mm
SN74HC595N	PDIP (16)	19.31 mm × 6.35 mm
SN74HC595D	SOIC (16)	9.90 mm x 3.90 mm
SN74HC595DW	SOIC (16)	10.30 mm x 7.50 mm
SN74HC595DB	SSOP (16)	6.20 mm x 5.30 mm
SN74HC595PW	TSSOP (16)	5.00 mm x 4.40 mm



## 6 Pin Configuration and Functions

D, N, NS, J, DB, or PW Package 16-Pin SOIC, PDIP, SO, CDIP, SSOP, or TSSOP Top View





#### **Pin Functions**

	PIN			
NAME	SOIC, PDIP, SO, CDIP, SSOP, or TSSOP	LCCC	I/O	DESCRIPTION
GND	8	10	_	Ground Pin
ŌE	13	17	I	Output Enable
$Q_A$	15	19	0	Q <sub>A</sub> Output
$Q_B$	1	2	0	Q <sub>B</sub> Output
$Q_{C}$	2	3	0	Q <sub>C</sub> Output
$Q_D$	3	4	0	Q <sub>D</sub> Output
$Q_{E}$	4	5	0	Q <sub>E</sub> Output
$Q_{F}$	5	7	0	Q <sub>F</sub> Output
$Q_{G}$	6	8	0	Q <sub>G</sub> Output
$Q_{H}$	7	9	0	Q <sub>H</sub> Output
$Q_{H'}$	9	12	0	Q <sub>H'</sub> Output
RCLK	12	14	I	RCLK Input
SER	14	18	I	SER Input
SRCLK	11	14	I	SRCLK Input
SRCLR	10	13	I	SRCLR Input
		1		
NC		16		No Connection
INC		11	_	NO COMBECTION
		16		
V <sub>CC</sub>	_	20	_	Power Pin



## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage		-0.5	7	V
I <sub>IK</sub>	Input clamp current <sup>(2)</sup>	$V_I < 0$ or $V_I > V_{CC}$		±20	mA
lok	Output clamp current (2)	$V_O < 0$ or $V_O > V_{CC}$		±20	mA
Io	Continuous output current	$V_O = 0$ to $V_{CC}$		±35	mA
	Continuous current through V <sub>CC</sub> or GND			±70	mA
TJ	Junction temperature			150	°C
T <sub>stg</sub>	Storage temperature		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

			VALUE	UNIT
		Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	2000	
V <sub>(ESI</sub>	D) Electrostatic discharge	Charged-device model (CDM), per JEDEC specification JESD22-C101, all pins (2)	1000	V

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

## 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted) (1)

			SN	154HC59	5	SN74HC595		LINUT	
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage		2	5	6	2	5	6	V
		$V_{CC} = 2 V$	1.5			1.5			
$V_{IH}$	High-level input voltage	$V_{CC} = 4.5 \text{ V}$	3.15			3.15			V
		$V_{CC} = 6 V$	4.2			4.2			
	Low-level input voltage	$V_{CC} = 2 V$			0.5			0.5	
$V_{IL}$		$V_{CC} = 4.5 \text{ V}$			1.35			1.35	V
		$V_{CC} = 6 V$			1.8			1.8	
$V_{I}$	Input voltage		0		$V_{CC}$	0		$V_{CC}$	V
Vo	Output voltage		0		$V_{CC}$	0		$V_{CC}$	V
		$V_{CC} = 2 V$			1000			1000	
Δt/Δν	Input transition rise or fall time (2)	$V_{CC} = 4.5 \text{ V}$			500			500	ns
		$V_{CC} = 6 V$			400			400	
T <sub>A</sub>	Operating free-air temperature		-55		125	-40		85	ô

All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See the TI application report, Implications of Slow or Floating CMOS Inputs, SCBA004.

<sup>(2)</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

<sup>(2)</sup> If this device is used in the threshold region (from V<sub>IL</sub>max = 0.5 V to V<sub>IH</sub> min = 1.5 V), there is a potential to go into the wrong state from induced grounding, causing double clocking. Operating with the inputs at t<sub>t</sub> = 1000 ns and V<sub>CC</sub> = 2 V does not damage the device; however, functionally, the CLK inputs are not ensured while in the shift, count, or toggle operating modes.



#### 7.4 Thermal Information

		SN74AHCT595							
THERMAL METRIC <sup>(1)</sup>		D (SOIC)	DB (SSOP)	DW (SOIC)	N (PDIP)	NS (SO)	PW (TSSOP)	UNIT	
		16 PINS	16 PINS	16 PINS	16 PINS	16 PINS	16 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	73	82	57	67	64	108	°C/W	

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

#### 7.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED		OT CONDITIONS	.,	Т	<sub>A</sub> = 25°C		SN54H0	C595	SN74HC595		UNIT
PARAMETER	16	ST CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	1.9	1.998		1.9		1.9		
		$I_{OH} = -20 \mu A$	4.5 V	4.4	4.499		4.4		4.4		
			6 V	5.9	5.999		5.9		5.9		
V <sub>OH</sub>	$V_I = V_{IH}$ or $V_{IL}$	$Q_{H'}$ , $I_{OH} = -4 \text{ mA}$	451/	3.98	4.3		3.7		3.84		V
		$Q_A - Q_H$ , $I_{OH} = -6 \text{ mA}$	4.5 V	3.98	4.3		3.7		3.84		
		$Q_{H'}$ , $I_{OH} = -5.2 \text{ mA}$	6 V	5.48	5.8		5.2		5.34		
		$Q_A - Q_H$ , $I_{OH} = -7.8 \text{ mA}$	6 V	5.48	5.8		5.2		5.34		
	$V_{I} = V_{IH}$ or $V_{IL}$	I <sub>OL</sub> = 20 μA	2 V		0.002	0.1		0.1		0.1	
			4.5 V		0.001	0.1		0.1		0.1	
			6 V		0.001	0.1		0.1		0.1	
V <sub>OL</sub>		$Q_{H'}$ , $I_{OL} = 4 \text{ mA}$	4.5 V		0.17	0.26		0.4		0.33	V
		$Q_A - Q_H$ , $I_{OL} = 6 \text{ mA}$	4.5 V		0.17	0.26		0.4		0.33	
		Q <sub>H</sub> , I <sub>OL</sub> = 5.2 mA	6 V		0.15	0.26		0.4		0.33	
		$Q_A - Q_H$ , $I_{OL} = 7.8 \text{ mA}$	6 V		0.15	0.26		0.4		0.33	
I	$V_I = V_{CC}$ or 0		6 V		±0.1	±100		±1000		±1000	nA
I <sub>OZ</sub>	$V_O = V_{CC}$ or 0, $Q_A$	_ Q — Q <sub>H</sub>	6 V		±0.01	±0.5		±10		±5	μΑ
Icc	$V_I = V_{CC}$ or 0, $I_O =$	= 0	6 V			8		160		80	μΑ
C <sub>i</sub>			2 V to 6 V		3	10		10		10	pF

Product Folder Links: SN54HC595 SN74HC595

ubinit Documentation Feedback



## 7.6 Timing Requirements

over operating free-air temperature range (unless otherwise noted)

			V	T <sub>A</sub> = 2	25°C	SN54H	C595	SN74HC595		LINUT
			V <sub>CC</sub>	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V		6		4.2		5	
f <sub>clock</sub>	Clock frequency		4.5 V		31		21	·	25	MHz
			6 V		36		25	·	29	
			2 V	80		120		100		_
		SRCLK or RCLK high or low	4.5 V	16		24		20		
	Pulse duration		6 V	14		20		17		
t <sub>w</sub> Pulse duration		2 V	80		120		100		ns	
		SRCLR low	4.5 V	16		24		20		
			6 V	14		20		17		
			2 V	100		150		125		
		SER before SRCLK↑	4.5 V	20		30		25		-
			6 V	17		25		21		
		SRCLK↑ before RCLK↑ <sup>(1)</sup>	2 V	75		113		94		
			4.5 V	15		23		19		
	Cat un tima		6 V	13		19		16		
t <sub>su</sub>	Set-up time		2 V	50		75		65		ns
		SRCLR low before RCLK↑	4.5 V	10		15		13		
			6 V	9		13		11		
			2 V	50		75		60		
		SRCLR high (inactive) before SRCLK↑	4.5 V	10		15		12		
			6 V	9		13		11		
			2 V	0		0		0		
t <sub>h</sub>	Hold time, SER	after SRCLK↑	4.5 V	0		0		0		ns
			6 V	0		0		0		

<sup>(1)</sup> This set-up time allows the storage register to receive stable data from the shift register. The clocks can be tied together, in which case the shift register is one clock pulse ahead of the storage register.



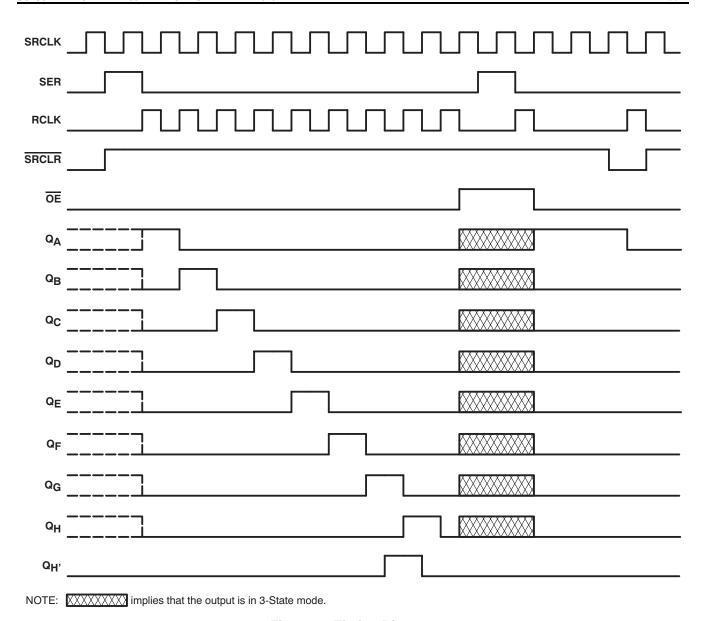


Figure 1. Timing Diagram

Submit Documentation Feedback

Copyright © 1982–2015, Texas Instruments Incorporated



## 7.7 Switching Characteristics

Over recommended operating free-air temperature range.

DADAMETED	FROM	то	LOAD	v	TA	= 25°0	3	SN54H	C595	SN74H	C595	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	V <sub>CC</sub>	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII
				2 V	6	26		4.2		5		
max			50 pF	4.5 V	31	38		21		25		MHz
				6 V	36	42		25		29		
				2 V		50	160		240		200	
	SRCLK	$Q_{H'}$	50 pF	4.5 V		17	32		48		40	
				6 V		14	27		41		34	
t <sub>pd</sub>				2 V		50	150		225		187	ns
	RCLK	$Q_A - Q_H$	50 pF	4.5 V		17	30		45		37	
				6 V		14	26		38		32	
				2 V		51	175		261		219	
t <sub>PHL</sub>	SRCLR	$Q_{H'}$	50 pF	4.5 V		18	35		52		44	ns
				6 V		15	30		44		37	
				2 V		40	150		255		187	
en	ŌĒ	$Q_A - Q_H$	50 pF	4.5 V		15	30		45		37	ns
				6 V		13	26		38		32	
				2 V		42	200		300		250	
t <sub>dis</sub>	ŌĒ	$Q_A - Q_H$	50 pF	4.5 V		23	40		60		50	ns
				6 V		20	34		51		43	
				2 V		28	60		90		75	
		$Q_A - Q_H$	50 pF	4.5 V		8	12		18		15	
				6 V		6	10		15		13	1
t				2 V		28	75		110		95	ns
		$Q_{H'}$	50 pF	4.5 V		8	15		22		19	
				6 V		6	13		19		16	
		1		2 V		60	200		300		250	
t <sub>pd</sub>	RCLK	$Q_A - Q_H$	150 pf	4.5 V		22	40		60		50	ns
•				6 V		19	34		51		43	
				2 V		70	200		298		250	
en	ŌĒ	$Q_A - Q_H$	150 pf	4.5 V		23	40		60		50	ns
-				6 V		19	34		51		43	
		1		2 V		45	210		315		265	
t <sub>t</sub>		$Q_A - Q_H$	150 pf	4.5 V		17	42		63		53	ns
-			,	6 V		13	36		53		45	


## 7.8 Operating Characteristics

 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	No load	400	pF




## 7.9 Typical Characteristics

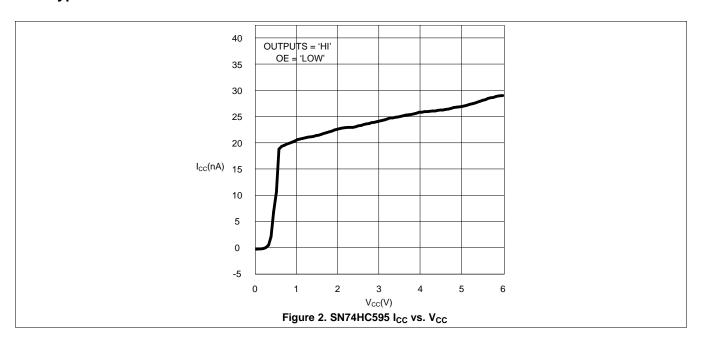





#### Parameter Measurement Information





PARAI	METER	RL	CL	S1	S2	
t	<sup>t</sup> PZH	<b>1 k</b> Ω	50 pF or	Open	Closed	
ten	tPZL	1 K22	150 pF	Closed	Open	
<b>+</b>	tPHZ	<b>1 k</b> Ω	50 pF	Open	Closed	
<sup>t</sup> dis	tPLZ	1 K32	30 pi	Closed	Open	
t <sub>pd</sub> or	tţ		50 pF or 150 pF	Open	Open	





**VOLTAGE WAVEFORMS** SETUP AND HOLD AND INPUT RISE AND FALL TIMES





**VOLTAGE WAVEFORMS** PROPAGATION DELAY AND OUTPUT TRANSITION TIMES

**VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS** 

NOTES: A. C<sub>L</sub> includes probe and test-fixture capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r = 6 \text{ ns}$ ,  $t_f = 6 \text{ ns}$ .
- D. For clock inputs,  $f_{\text{max}}$  is measured when the input duty cycle is 50%.
- E. The outputs are measured one at a time, with one input transition per measurement.
- F. tpLz and tpHz are the same as tdis.
- G. tpzI and tpzH are the same as ten.
- H. tplH and tpHL are the same as tpd.

Figure 3. Load Circuit and Voltage Waveforms

Product Folder Links: SN54HC595 SN74HC595

11



### 9 Detailed Description

#### 9.1 Overview

The SNx4HC595 is part of the HC family of logic devices intended for CMOS applications. The SNx4HC595 is an 8-bit shift register that feeds an 8-bit D-type storage register.

Both the shift register clock (SRCLK) and storage register clock (RCLK) are positive-edge triggered. If both clocks are connected together, the shift register always is one clock pulse ahead of the storage register.

#### 9.2 Functional Block Diagram

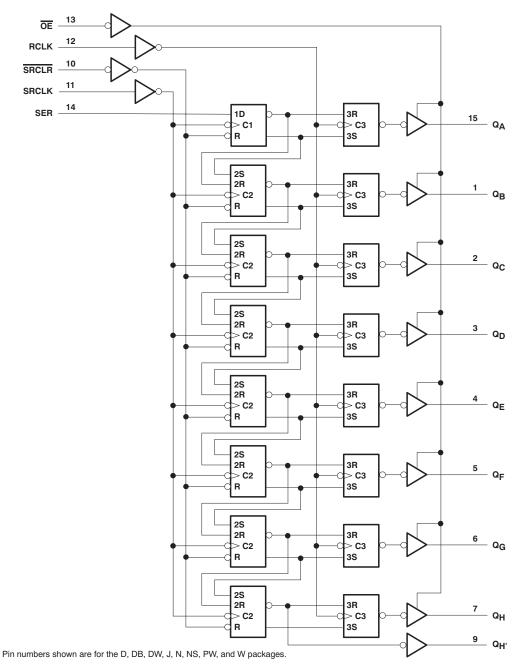


Figure 4. Logic Diagram (Positive Logic)

Submit Documentation Feedback

Copyright © 1982–2015, Texas Instruments Incorporated



### 9.3 Feature Description

The SNx4HC595 devices are 8-bit Serial-In, Parallel-Out Shift Registers. They have a wide operating current of 2 V to 6 V, and the high-current 3-state outputs can drive up to 15 LSTTL Loads. The devices have a low power consumption of 80- $\mu$ A (Maximum) I<sub>CC</sub>. Additionally, the devices have a low input current of 1  $\mu$ A (Maximum) and a ±6-mA Output Drive at 5 V.

### 9.4 Device Functional Modes

Table 1 lists the functional modes of the SNx4HC595 devices.

**Table 1. Function Table** 

		INPUTS			FUNCTION
SER	SRCLK	SRCLR	RCLK	ŌĒ	FUNCTION
X	Х	Х	Х	Н	Outputs Q <sub>A</sub> – Q <sub>H</sub> are disabled.
Х	Х	Х	Х	L	Outputs Q <sub>A</sub> – Q <sub>H</sub> are enabled.
Χ	Х	L	Х	Х	Shift register is cleared.
L	1	Н	Х	Х	First stage of the shift register goes low. Other stages store the data of previous stage, respectively.
Н	1	Н	Х	Х	First stage of the shift register goes high. Other stages store the data of previous stage, respectively.
Х	Х	Х	1	Х	Shift-register data is stored in the storage register.



## 10 Application and Implementation

#### 10.1 Application Information

The SNx4HC595 is a low-drive CMOS device that can be used for a multitude of bus interface type applications where output ringing is a concern. The low drive and slow edge rates will minimize overshoot and undershoot on the outputs.

### 10.2 Typical Application

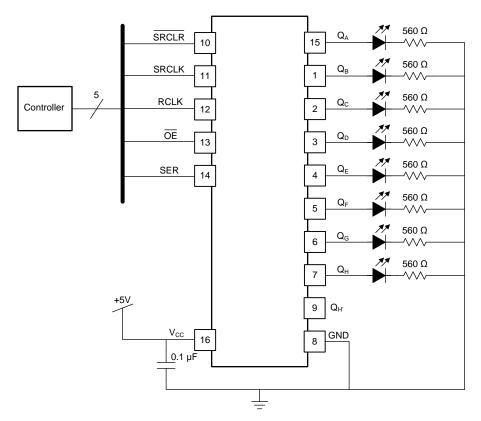


Figure 5. Typical Application Schematic

#### 10.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads so routing and load conditions should be considered to prevent ringing.

#### 10.2.2 Detailed Design Procedure


- Recommended input conditions
  - Specified high and low levels. See (V<sub>IH</sub> and V<sub>IL</sub>) in the Recommended Operating Conditions table.
  - Specified high and low levels. See (V<sub>IH</sub> and V<sub>IL</sub>) in the *Recommended Operating Conditions* table.
  - Inputs are overvoltage tolerant allowing them to go as high as 5.5 V at any valid  $V_{CC}$
- Recommend output conditions
  - Load currents should not exceed 35 mA per output and 70 mA total for the part
  - Outputs should not be pulled above V<sub>CC</sub>

Submit Documentation Feedback



## **Typical Application (continued)**

## 10.2.3 Application Curves

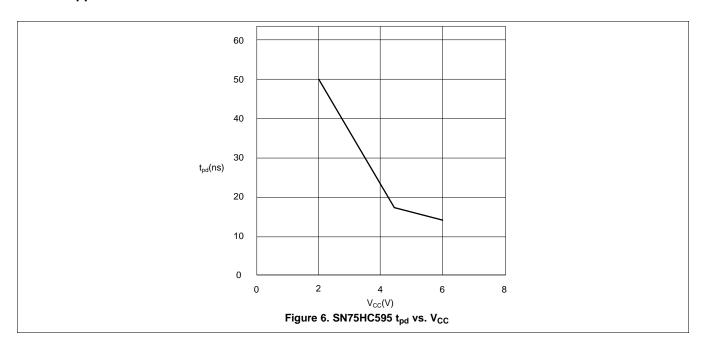

Submit Documentation Feedback



## 11 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions* table.

Each  $V_{CC}$  pin should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1  $\mu$ f is recommended; if there are multiple  $V_{CC}$  pins, then 0.01  $\mu$ f or 0.022  $\mu$ f is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1  $\mu$ f and a 1  $\mu$ f are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

## 12 Layout

## 12.1 Layout Guidelines

When using multiple-bit logic devices, inputs should never float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Figure 7 specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or  $V_{CC}$ , whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver. If the transceiver has an output enable pin, it will disable the output section of the part when asserted. This will not disable the input section of the I/Os, so they cannot float when disabled.

### 12.2 Layout Example

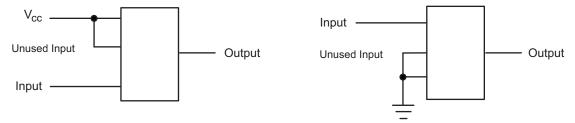


Figure 7. Layout Diagram

Submit Documentation Feedback



## 13 Device and Documentation Support

#### 13.1 Documentation Support

#### 13.1.1 Related Documentation

For related documentation, see the following:

Implications of Slow or Floating CMOS Inputs, SCBA004

#### 13.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 2. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY	
SN54HC595	Click here	Click here	Click here	Click here	Click here	
SN74HC595	Click here	Click here	Click here	Click here	Click here	

#### 13.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 13.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 13.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 13.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser based versions of this data sheet, refer to the left hand navigation.





24-Aug-2018

### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-86816012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 86816012A SNJ54HC 595FK	Samples
5962-8681601EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-8681601EA SNJ54HC595J	Samples
5962-8681601VEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-8681601VE A SNV54HC595J	Samples
5962-8681601VFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-8681601VF A SNV54HC595W	Samples
SN54HC595J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN54HC595J	Samples
SN74HC595D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DBR	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DBRE4	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DBRG4	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU   CU SN	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DRG3	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	HC595	Samples
SN74HC595DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samples





www.ti.com

24-Aug-2018

Orderable Device	Status	Package Type	_	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Sample
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
SN74HC595DT	ACTIVE	SOIC	D	16	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sample
SN74HC595DW	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sample
SN74HC595DWR	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sampl
SN74HC595DWRE4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sampl
SN74HC595DWRG4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sampl
SN74HC595N	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU   CU SN	N / A for Pkg Type	-40 to 85	SN74HC595N	Samp
SN74HC595NE4	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU	N / A for Pkg Type	-40 to 85	SN74HC595N	Samp
SN74HC595NSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sampl
SN74HC595PW	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Sampl
SN74HC595PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU   CU SN	Level-1-260C-UNLIM	-40 to 85	HC595	Samp
SN74HC595PWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samp
SN74HC595PWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC595	Samp
SNJ54HC595FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	5962- 86816012A SNJ54HC 595FK	Samp
SNJ54HC595J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type	-55 to 125	5962-8681601EA SNJ54HC595J	Samp

<sup>(1)</sup> The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW**: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

## PACKAGE OPTION ADDENDUM



24-Aug-2018

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54HC595, SN54HC595-SP, SN74HC595:

Catalog: SN74HC595, SN54HC595

• Enhanced Product: SN74HC595-EP, SN74HC595-EP

Military: SN54HC595

Space: SN54HC595-SP

NOTE: Qualified Version Definitions:

Catalog - TI's standard catalog product





24-Aug-2018


- Enhanced Product Supports Defense, Aerospace and Medical Applications
- Military QML certified for Military and Defense Applications
- Space Radiation tolerant, ceramic packaging and qualified for use in Space-based application

PACKAGE MATERIALS INFORMATION

www.ti.com 10-Jul-2019


## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

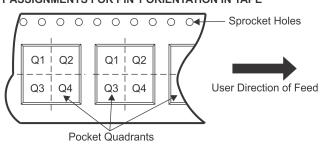

#### \*All dimensions are nominal

All difficults are norminal	т —											
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74HC595DR	SOIC	D	16	2500	330.0	16.8	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC595DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC595DRG3	SOIC	D	16	2500	330.0	16.8	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC595DRG4	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC595DRG4	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC595DWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
SN74HC595DWRG4	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
SN74HC595PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74HC595PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74HC595PWRG4	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 10-Jul-2019



\*All dimensions are nominal

All difficusions are nominal		•					1
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74HC595DR	SOIC	D	16	2500	364.0	364.0	27.0
SN74HC595DR	SOIC	D	16	2500	333.2	345.9	28.6
SN74HC595DRG3	SOIC	D	16	2500	364.0	364.0	27.0
SN74HC595DRG4	SOIC	D	16	2500	333.2	345.9	28.6
SN74HC595DRG4	SOIC	D	16	2500	367.0	367.0	38.0
SN74HC595DWR	SOIC	DW	16	2000	350.0	350.0	43.0
SN74HC595DWRG4	SOIC	DW	16	2000	350.0	350.0	43.0
SN74HC595PWR	TSSOP	PW	16	2000	367.0	367.0	35.0
SN74HC595PWR	TSSOP	PW	16	2000	364.0	364.0	27.0
SN74HC595PWRG4	TSSOP	PW	16	2000	367.0	367.0	35.0

## FK (S-CQCC-N\*\*)

## LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



## D (R-PDS0-G16)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



# D (R-PDSO-G16)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.





SMALL OUTLINE PACKAGE



- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## **MECHANICAL DATA**

## NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





SOIC



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
- 5. Reference JEDEC registration MS-013.



SOIC



#### NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



#### NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# W (R-GDFP-F16)

## CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP2-F16



## 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

## N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<a href="www.ti.com/legal/termsofsale.html">www.ti.com/legal/termsofsale.html</a>) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2019, Texas Instruments Incorporated