Technical Data Sheet Infrared Remote-control Receiver Module

Features :

- · High protection ability against EMI .
- · Circular lens to improve the receive characteristic.
- Line-up for various center carrier frequencies.
- · Low voltage and low power consumption.
- · High immunity against ambient light.
- Photodiode with integrated circuit.
- TTL and CMOS compatibility.
- · Long reception distance.
- High sensitivity.


Description :

 The device is a miniature type infrared remote control system receiver which has been developed and designed by utilizing the most updated IC technology. The PIN diode and preamplifier are assembled on lead frame, the epoxy package is designed as an IR filter. The demodulated output signal can directly be decoded by a microprocessor.

Applications :

- 1. Optical switch
- 2. Light detecting portion of remote control
- AV instruments such as Audio, TV, VCR, CD, MD, etc.
- Home appliances such as Air-conditioner, Fan , etc.
- The other equipments with wireless remote control.
- CATV set top boxes
- Multi-media Equipment


PART	MATERIAL	COLOR
Chip	Silicon	
Compound	Ероху	Black



IRM-2036F14

Package Dimensions :

IRM-2036F14

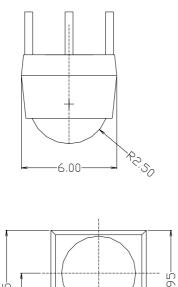

õ


3-0.50

0.50

40

2.54

2.54-1-2 -----5.08

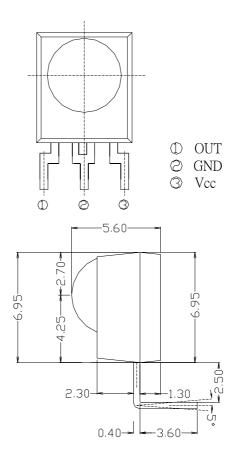

NOTES :

1. All dimensions are in millimeters.

-8.25-

-5.55-

0

2. In case of designation is tolerance ± 0.3 mm.

Absolute Maximum Ratings at TA = 25° C

Parameter	Symbol	Rating	Unit	Notice
Supply Voltage	Vcc	0~6	V	
Operating Temperature	Topr	-25 ~ +80	°C	
Storage Temperature	Tstg	-40 ~ +85	°C	
Soldering Temperature	Tsol	260	°C	4mm from mold body less than 5 seconds



Electronic Optical Characteristics :

TA = 25°℃

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Supply Voltage	Vcc	4.5	5	5.5	V	DC voltage
Supply Current	lcc			3	mA	No signal input
B.P.F Center Frequency	Fo		36		KHz	
Peak Wavelength	λp		940		nm	
Reception Distance	Lo	12			m	At the ray axis *1
	L45	5				
Half Angle(Horizontal)	Θ_{h}		45		deg	
Half Angle(Vertical)	θv		45		deg	
High Level Pulse Width	Т _Н	400		800	μ S	At the ray axis *2
Low Level Pulse Width	ΤL	400		800	μ S	
High Level Output Voltage	V _H	4.5			V	
Low Level Output Voltage	VL		0.2	0.5	V	

Appendix of Page 3 :

*1:The ray receiving surface at a vertex and relation to the ray axis in the range of θ = 0° and θ =45°.

*2:A range from 30cm to the arrival distance. Average value of 50 pulses.

Test Method :

The specified electro-optical characteristics is satisfied under the following Conditions at the controllable distance.

①Measurement place

A place that is nothing of extreme light reflected in the room.

②External light

Project the light of ordinary white fluorescent lamps which are not high Frequency lamps and must be less then 10 Lux at the module surface.

(Ee \leq 10Lux)

③Standard transmitter

A transmitter whose output is so adjusted as to **Vo=400mVp-p** and the output Wave form shown in Fig.-1.According to the measurement method shown in Fig.-2 the standard transmitter is specified.


However , the infrared photodiode to be used for the transmitter should be $\lambda p=940nm, \Delta \lambda=50nm$. Also, photodiode is used of PD438B(Vr=5V).

(Standard light / Light source temperature 2856°K).


Measuring system

According to the measuring system shown in Fig.-3

Block Diagram :

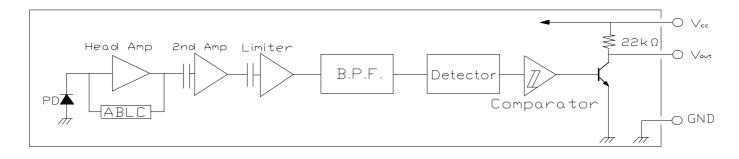



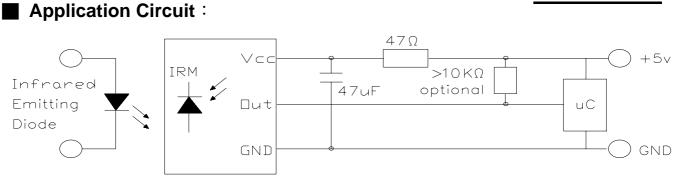

RC Filter should be connected closely between Vcc pin and GND pin.

Fig.-1 Transmitter Wave Form

D.U.T output Pulse

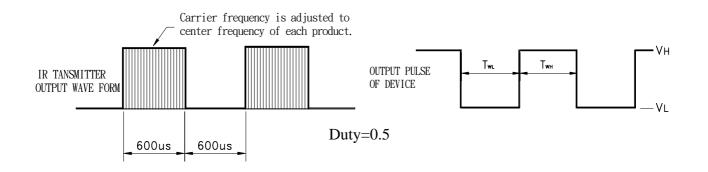


Fig.-2 Measuring Method


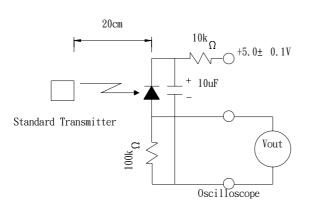


Fig.-3 Measuring System



Everlight Electronics Co., Ltd. Device No : DMO-020-346

http://www.everlight.com Prepared date : 10-11-2004 Rev 1.0 Page: 5 of 8 Prepared by : David Huang

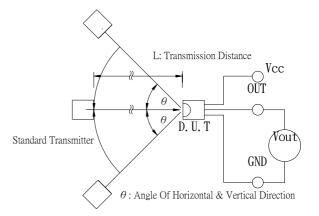

TYPICAL ELECTRICAL/OPTICAL/CHARACTERISTICS CURVES

Fig.-4 Relative Spectral Sensitivity vs. Wavelength Fig.-5 Relative Transmission Distance vs. Direction




Fig.-6 Output Pulse Length vs. Arrival Distance





Fig.-8 Relative Transmission Distance vs. Center Carrier Frequency








Fig.-7 Arrival Distance vs. Supply Voltage

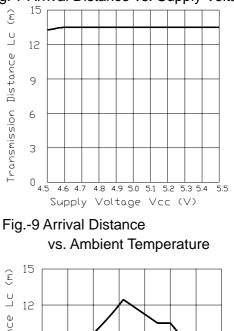



Everlight Electronics Co., Ltd. Device No : DMO-020-346 http://www.everlight.com Prepared date : 10-11-2004 Rev 1.0 Page: 6 of 8 Prepared by : David Huang

Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level: 90% LTPD: 10%


Test Items	Test Conditions	Failure Judgement Criteria	<u>Samples(n)</u> Defective(c)
Temperature cycle	1 cycle -40℃ +25℃ +85℃ (30min)(5min)(30min) 300 cycle test		n=22,c=0
High temperature test	Temp: +85℃ Vcc:6V 1000hrs	$L_0 \leq Lx0.8$	n=22,c=0
Low temperature storage	Temp: -40℃ 1000hrs	L ₄₅ ≦ Lx0.8 L: Lower	n=22,c=0
High temperature High humidity		specification limit	n=22,c=0
Solder heat	Temp: $260\pm5^{\circ}$ C 10sec 4mm From the bottom of the package.		n=22,c=0



Packing Quantity Specification

- 1.1500PCS/1Box
- 2. 10Boxes/1Carton

Label Form Specification

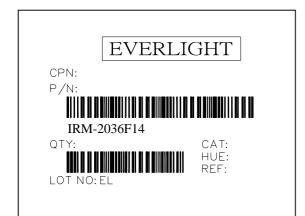

CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks HUE: Peak Wavelength REF: Reference LOT No: Lot Number MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306