

SG-210STF

SEIKO EPSON CORPORATION

CRYSTAL OSCILLATOR (SPXO) OUTPUT : CMOS



Product Number SG2016CAN: X1G004801xxxx00 SG-210STF: X1G004171xxxx00 SG3225CAN: X1G005961xxxx15 SG5032CAN: X1G004451xxxx00 SG7050CAN: X1G004481xxxx00

- Frequency range
- : 1.2 MHz to 75 MHz (SG2016CAN)
 - 1 MHz to 75 MHz (other than the above)
 - 1.8 V to 3.3 V Typ. 2
- Supply voltage Function
- Standby(ST) ÷ .
- Operating temperature : -40 °C to +105 °C

Specifications (characteristics)

opecifications	(onal aoto							
Item	Symbol	Specifications			Conditions / Remarks			
	fo	1.2 MHz to 75 MHz			SG20160	CAN	Please contact u	us about available
Output frequency range		1 MHz to 75 MHz			All others	3	frequencies.	
		1.60 V to 3.63 V			1 MHz \leq fo \leq 60 MHz, T_use = +105 °C Max.			
Supply voltage	V _{cc}	1.71 V to 3.63 V			$60 \text{ MHz} < \text{fo} \le 75 \text{ MHz}, \text{ T_use} = +85 \text{ °C Max.}$ Refer to figure *1			
		2.25 V to 3.63 V			$60 \text{ MHz} < \text{fo} \le 75 \text{ MHz}, \text{ T_use} = +105 \text{ °C Max}.$			
Starage temperature	Tata	-55 °C to +125 °C			SG2016CAN			
Storage temperature	T_stg	-40 °C to +125 °C			All others			
Operating temperature	T_use	-20 °C to +70 °	C, -40 °C to +85 °C, -4	0 °C to +105 °C	See of figure *1			
		$\pm 25 \times 10^{-6}, \pm 50 \times 10^{-6}$			-20 °C to	+70 °C		
Frequency tolerance	f_tol	$\pm 50 \times 10^{-6}$			-40 °C to +85 °C			
		$\pm 50 \times 10^{-6}, \pm 100 \times 10^{-6}$			-40 °C to +105 °C			
		$V_{CC} = 1.8 \text{ V} \pm 10 \%$	$V_{CC} = 2.5 \text{ V} \pm 10 \%$	$V_{CC} = 3.3 \text{ V} \pm 10 \%$				
	lcc	1.5 mA Max.	1.6 mA Max.	1.8 mA Max.	No load condition, 1 MHz \leq fo \leq 20 MHz			
Current consumption		1.8 mA Max.	2.0 mA Max.	2.2 mA Max.	No load condition, 20 MHz < fo \leq 40 MHz			
		2.1 mA Max.	2.4 mA Max.	2.6 mA Max.	No load condition, 40 MHz < fo \leq 60 MHz			
		2.4 mA Max.	2.8 mA Max.	3.0 mA Max.	No load condition, 60 MHz < fo \leq 75 MHz			
Stand-by current	I_std	2.1 µA Max. 2.5 µA Max. 2.7 µA Max.			ST =GN	D		
Symmetry	SYM	45 % to 55 %			50 % V _{CC} level, L_CMOS \leq 15 pF			
	V _{OH}	90 % V _{CC} Min.				1.8 V ± 10 %	2.5 V ± 10 %	3.3 V ± 10 %
	V _{OL}	10 % V _{CC} Max.			I _{OH}	-1.5 mA 1.5 mA	-3 mA 3 mA	-4 mA 4 mA
Output voltage	V _{OH-2}	V _{CC} - 0.4 V Min.				1.8 V±10 %	2.5 V±10 %	3.3 V±10 %
	V _{OL-2}	0.4 V Max.			I _{OH}	-3 mA 3 mA	-4 mA 4 mA	-6 mA 6 mA
Output load condition (CMOS)	L_CMOS		15 pF Max.				<u>.</u>	
Input voltage	VIH	80 % V _{CC} Min.			- ST terminal			
	VIL	20 % V _{CC} Max.						
Rise time and Fall time	tr / tf	3 ns Max. 3.5 ns Max. (@1.8 V±10 %)			20 % V _{CC} to 80 % V _{CC} level, L_CMOS = 15 pF			
Start-up time	t_str	3 ms Max.			T = 0 at 90 % V _{CC}			
Frequency aging	f_age	$\pm 3 \times 10^{-6}$ / year Max.			+25 °C, F	First year		

[Model: SG2016/3225/5032/7050CAN]

Product name SG2016 C AN 25.000000MHz T J G A (56: Available code DB, JB, JG, JH, LG, LH)

2 4567 (Standard form) 1 3

①Model @Output(C:CMOS) ③Frequency ④Supply voltage

Trequency tolerance	e ope	aling temperature range	Uniter	mai identification code(A is delault)

(4) Supply voltage See *1	5 Frequency tolerance	©Operating temperature range		
T 1.60 to 3.63 V	D ±25 × 10 ⁻⁶	B -20 °C to +70 °C		
K 2.25 to 3.63 V	J $\pm 50 \times 10^{-6}$	G -40 °C to +85 °C		
	L $\pm 100 \times 10^{-6}$	H -40 °C to +105 °C		

±100 × 10⁻⁶ / -40 °C to +105 °C


[Model : SG-210STF]

Product name SG-210 S T F 25.00000MHz L (Standard form) 1 23 4 5

①Model ②Function(S:Standby) ③Supply voltage

④Frequency ⑤Frequency tolerance					
③Supply voltage See *1 ⑤Frequency tolerance					
T 1.60 to 3.63 V	S ±25 × 10 ⁻⁶ / -20 °C to +70 °C				
	L ±50 × 10 ⁻⁶ / -40 °C to +85 °C				
	Y ±50 × 10 ⁻⁶ /-40 °C to +105 °C				

W




*1 : The upper limit of Operating temperature and the related conditions

Please note that Supply voltage range (V_{CC}) depends on Output frequency(fo) and upper limit of Operationg temperature(T_use Max.).




SG7050CAN (7.0 x 5.0 mm)







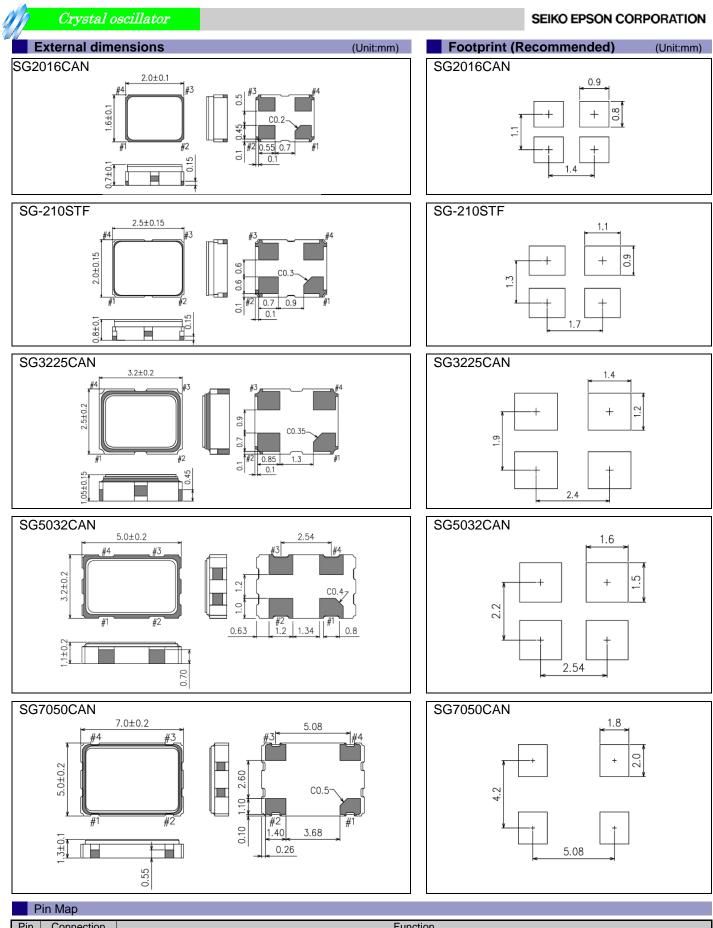

Pin	Connection	Function					
	ST	ST terminal					
4			ST function	Oscillator circuit	Output		
1	31		HIGH or "open"	Oscillation	Specified frequency: Enable		
			LOW	Oscillation stop	High impedance: Disable		
2	GND	Ground					
3	OUT	Clock o	utput				
4	V _{cc}	Power s	supply				
	-						

Notes: To maintain stable operation, provide a 0.01uF to 0.1uF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between Vcc - GND).

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

Explanation of the mark that are using it for the catalog

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Pb Free	► Pb free.
RoHS	 Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
For Automotive	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
Automotive Safety	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
 The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and
 regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of
 weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to
 any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, use etc.) / Madient intervented to a surface equipment (artificial satellites).
 - vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.