Spark Gap (SPG) Data Sheet

Features

- Approximately zero leaking current before clamping voltage
- Less decay at on/off state.


君耀电子 BrightKing

- High capability to withstand repeated lightning strikes.
- Low electrode capacitance(≤0.8pF) and high isolation(≥100MΩ).
- RoHS compliant.
- Bilateral symmetrical.
- Temperature, humidity and lightness insensitive.
- Operating temperature: -40°C ~ +85°C
- Storage temperature: -40°C ~ +125°C
- Meets MSL level 1, per J-STD-020
- Safety certification: UL: E244458

Applications

- Power Supplies
- Motor sparks eliminating
- Relay switching spark absorbing
- Data line pulse guarding
- Electronic devices requiring UL497A and UL497B compliant
- Telephone/Fax/Modem
- High frequency signal transmitters/receivers
- Satellite antenna
- Radio amplifiers
- Alarm systems
- Cathode ray tubes in Monitors/TVs

Dimensions

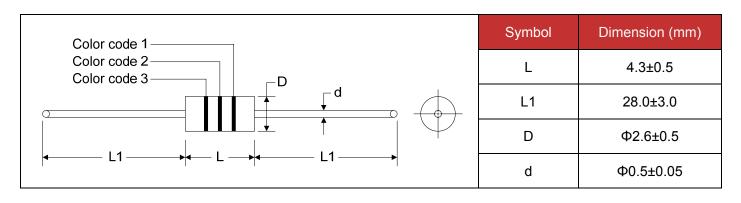



B 君耀电子 BrightKing

Electrical Characteristics

Part Number ①	DC Spark-over Voltage	Minimum Insulation Resistance		Maximum Capacitance (1KHz-6V _{MAX})	Surge current	Surge Life Test
	Vs(V)	Test Voltage(V)	IR _{OHM} (MΩ)	C(pf)	capacity (8/20µs)	8/20µs,100A
BK2XX00702	140	50	100	0.8	1000A	200 times
BK2XX01002	200	100	100	0.8	1000A	200 times
BK2XX01102	220	100	100	0.8	1000A	200 times
BK2XX01502	300	100	100	0.8	1000A	200 times
BK2XX02002	400	250	100	0.8	1000A	200 times
BK2XX02502	500	250	100	0.8	1000A	200 times
BK2XX03002	600	250	100	0.8	1000A	200 times
BK2XX03502	700	250	100	0.8	1000A	200 times
BK2XX05002	1000	500	100	0.8	1000A	200 times
BK2XX07502	1500	500	100	0.8	1000A	200 times

Note: 1) Vs±XX%

Color Code


Part Number	Color Code 1	Color Code 2	Color Code 3
BK2XX00702	Black	Yellow	-
BK2XX01002	Red	-	-
BK2XX01102	Red	Red	-
BK2XX01502	Orange	-	-
BK2XX02002	Yellow	-	-
BK2XX02502	Green	-	-
BK2XX03002	Blue	-	-
BK2XX03502	Purple	-	-
BK2XX05002	Black	-	-
BK2XX07502	Brown	Green	Red

B 君耀电子 BrightKing Test Methods and Results

Items Test Method Standard Measure starting discharge voltage (Vs) by gradually increasing applied DC voltage. Test DC Spark-over current is 0.5mA max. And the DC voltage Voltage ascends up within 100V/s(Vs<1000V) or 500V/s(Vs≥1000V). Measure the insulation resistance across the Meet specified value. Insulation terminal at regular voltage. But the test voltage Resistance doesn't over the DC spark-over voltage. Measure the electrostatic capacitance by applying a voltage of less than 6V (at 1KHz) Capacitance between terminals. 10KV with 1500pf condenser is discharged Static Life through 0Ω resistor. 200 times at an interval of Characteristics of other items must 10sec. meet the specified value. The following impulse current for specified current applied ±5 times, each time interval 60 seconds. Thereafter, outer appearance shall be visually examined. Surge Current No crack and no failures Impulse current Туре Capacity Vs < 400V 1.2/50µs & 8/20µs, 1000A 1.2/50µs & 8/20µs, 1000A, Vs ≥ 400V electrically connected with a resistor (1~2 Ω). Measurement after -40°C/1000 HRS & normal Cold Resistance temperature/2 HRS. Measurement after 125°C/1000 HRS & normal Heat Resistance temperature/2 HRS. Features are conformed to rated Measurement after humidity 90~95℃(45℃) spec. Humidity Resistance /1000 HRS & normal temperature/2 HRS. 10 times repetition of cycle -40°C/30min **Temperature Cycle** \rightarrow normal, temp/2 min \rightarrow 125°C/30min, measurement after normal temp/2 HRS. Apply flux and immerse in molten solder 230±5°C for 3sec up to the point of 1.5mm from Solder Ability Lead wire is evenly covered by solder. body. Check for solder adhesion. Measurement after lead wire is dipped up to Solder Heat the point of 1.5mm from body into 260±5℃ Conformed to rated spec. solder for 10sec. Pull Strength Apply 0.5kg load for 10sec. Bend lead wire at the point of 2mm from body Lead shall not pull out to snap. Flexural Strength under 0.25 load and back to its original point. Repeat 1 time.

B 君耀电子 BrightKing

Recommended Soldering Conditions

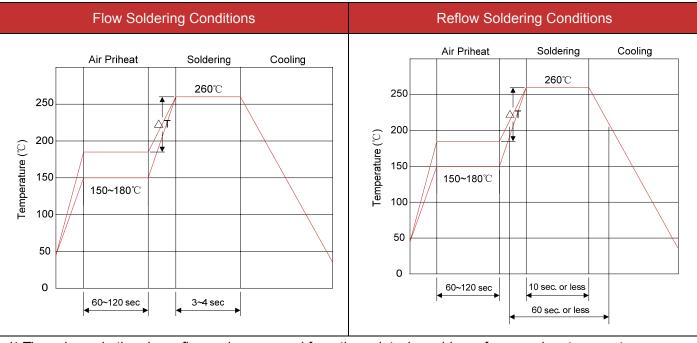

- 1) Time shown in the above figures is measured from the point when chip surface reaches temperature.
- 2) Temperature difference in high temperature part should be within 110 $^\circ\!{\rm C}.$

3) After soldering, do not force cool, allow the parts to cool gradually.

Hand Soldering

Solder iron temperature: $350\pm5^{\circ}$ C Heating time: 3 seconds max.

General attention to soldering

• High soldering temperatures and long soldering times can cause leaching of the termination, decrease in adherence strength, and the change of characteristic may occur.

- For soldering, please refer to the soldering curves above. However, please keep exposures to temperatures exceeding 200° C to fewer than 50 seconds.
- Please use a mild flux (containing less than 0.2wt% CI). Also, if the flux is water soluble, be sure to wash thoroughly to remove any residue from the underside of components that could affect resistance.

Cleaning

When using ultrasonic cleaning, the board may resonate if the output power is too high. Since this vibration can cause cracking or a decrease in the adherence of the termination, we recommend that you use the conditions below.

Frequency: 40kHz max.

Output power: 20W/liter

Cleaning time: 5 minutes max.

B 君耀电子 BrightKing

Packaging

Таре	Symbol	Dimension (mm)	
	W	52.0±1.5	
	Р	5.0±0.5	
	L1-L2	1.0max.	
	Т	6.0±1.0	
	Z	1.2max.	
	R	Terminals must not project from tape.	
	t	3.2max.	
	S	0.8max.	
	D	Ф3.1max.	
∢	D1	Ф0.5±0.05	
	L	4.8max.	
Inner Box	А	78.0	
B	В	78.0	
C C	С	255.0	
	Quantity: 2500PCS		