

Technical Data Sheet Top View LED

45-21UYC/S530-XX/TR8

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.



• The 45-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature `makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide


Chip	F-24-101	Resin Color	
Material	Emitted Color		
AlGaInP	Brilliant Yellow	Water Clear	


- =

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 10


45-21UYC/S530-XX/TR8


Package Outline Dimensions







Polarity









Recommended soldering pad design

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-451-023

http://www.everlight.com

Rev. 1

Page: 2 of 10

Prepared date:31-May.-2007 Prepared by:Ray Yuan



45-21UYC/S530-XX/TR8

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10



45-21UYC/S530-XX/TR8

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous intensity	Iv	A3	50	85			I _F =20mA
		A4	63	106		mcd	
		A5	80	133			
		A6	100	177			
		A7	125	215			
Viewing Angle	2 \theta 1/2			120		deg	I _F =20mA
Peak Wavelength	λp			591		nm	I _F =20mA
Dominant Wavelength	λd			589		nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ			15		nm	I _F =20mA
Forward Voltage	VF			2.0	2.4	V	I _F =20mA
Reverse Current	Ir				10	μΑ	V _R =5V


*45-21UYC/S530-<u>XX</u>/TR8

Chip Rank

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10

45-21UYC/S530-XX/TR8

Typical Electro-Optical Characteristics Curves

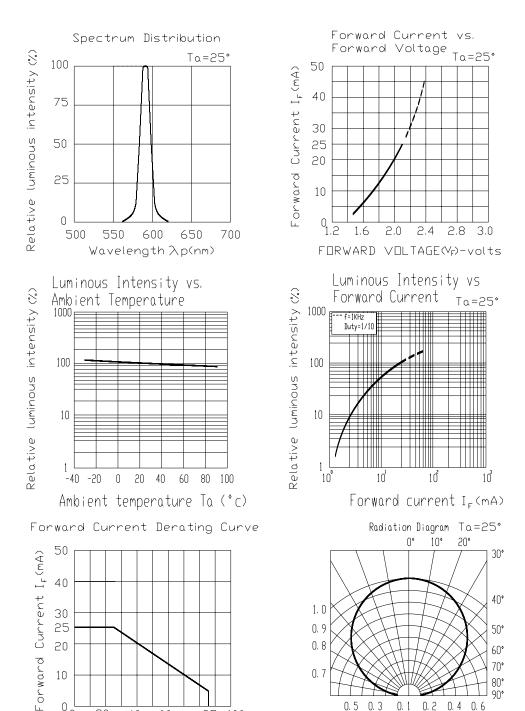

Device No.: DSE-451-023

0

AMBIENT TEMPERATURE To (°C)

0.5 0.3

0.1 0.2 0.4 0.6




45-21UYC/S530-XX/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

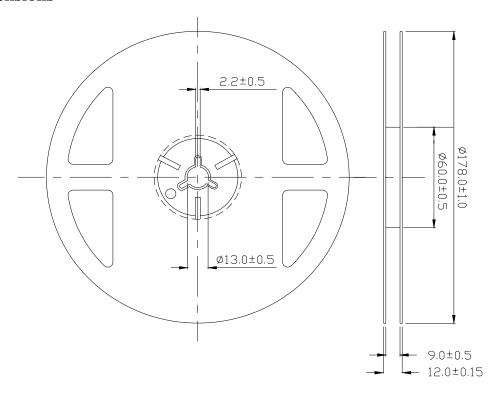

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE-451-023

http://www.everlight.com

Rev. 1

Page: 6 of 10


Prepared date:31-May.-2007

Prepared by:Ray Yuan




45-21UYC/S530-XX/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

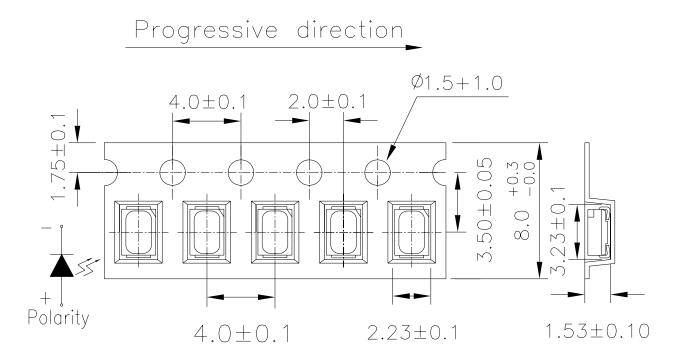

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

Moisture Resistant Packaging

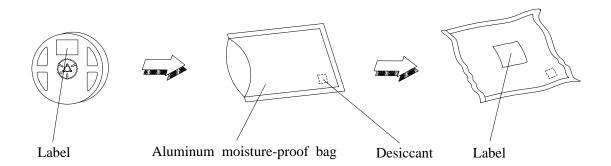

Everlight Electronics Co., Ltd.

Device No.: DSE-451-023

http://www.everlight.com

Prepared date:31-May.-2007

Rev. 1

Page: 7 of 10

Prepared by:Ray Yuan



45-21UYC/S530-XX/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°€	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1



45-21UYC/S530-XX/TR8


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

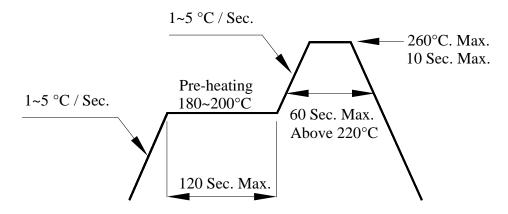

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10



45-21UYC/S530-XX/TR8

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

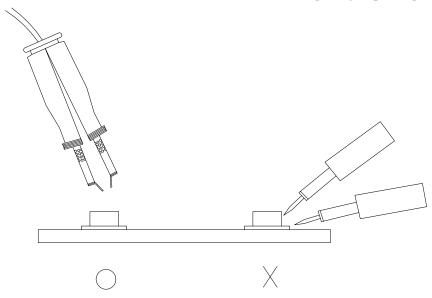

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. Page: 10 of 10 http://www.everlight.com Rev. 1