

Technical Data Sheet

0402 Package Chip LED (0.45 mm Height)

16-213UYC/S530-XX/TR8

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions


- The 16-213 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- · Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Material	Emitted Color	Lens Color	
AlGaInP	Brilliant Yellow	Water Clear	





Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 1 of 10 Device No: DSE-163-023

Prepared date: 04-Nov-2005


Prepared by: Ashley Kuo

Package Outline Dimensions






POLARITY



For Reflow Soldering

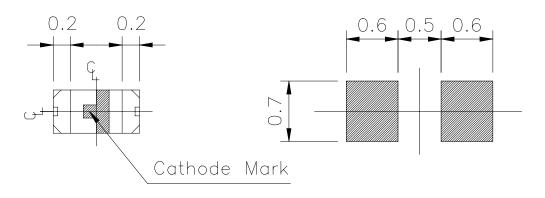

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No: DSE-163-023 Prepared date: 04-Nov-2005

http://www.everlight.com

Rev: 2

Page: 2 of 10

Prepared by: Ashley Kuo



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I F	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\mathbb{C}$	
Soldering Temperature	Tsol	260 (for 5 second)	${\mathbb C}$	
Electrostatic Discharge (HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 3 of 10



EVERLIGHT ELECTRONICS CO.,LTD.

16-213UYC/S530-XX/TR8

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity		A2	15	38			
		A3	25	40			
	Iv	A4	35	50		mcd	
		A5	50	70			
		A6	60	89			
Viewing Angle	2 \theta 1/2			120		deg	I _F =20mA
Peak Wavelength	λp			591		nm	
Dominant Wavelength	λd			589		nm	
Spectrum Radiation Bandwidth	Δλ			15		nm	
Forward Voltage	VF		1.7	2.0	2.4	V	V
Reverse Current	Ir				10	μ A	V _R =5V


*16-213UYC/S530-XX/TR8





Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 4 of 10 Device No: DSE-163-023


Prepared date: 04-Nov-2005 Prepared by: Ashley Kuo


Typical Electro-Optical Characteristics Curves















Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 5 of 10

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

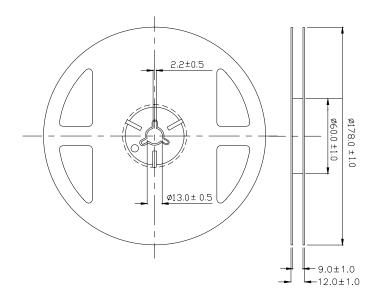

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

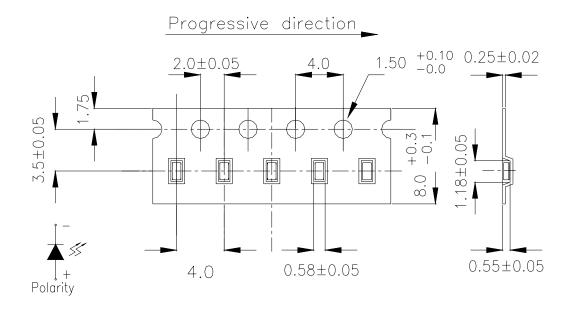

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

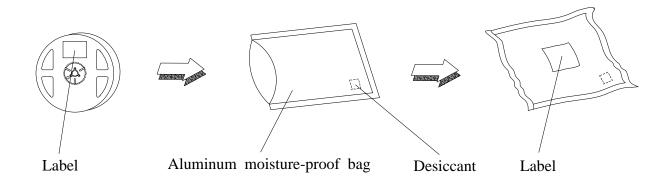

Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 8 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

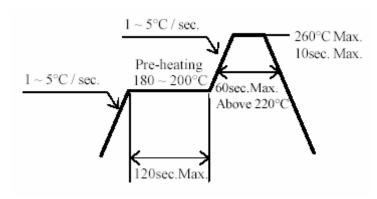

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 9 of 10

Device No: DSE-163-023 Prepared date: 04-Nov-2005 Prepared by: Ashley Kuo




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

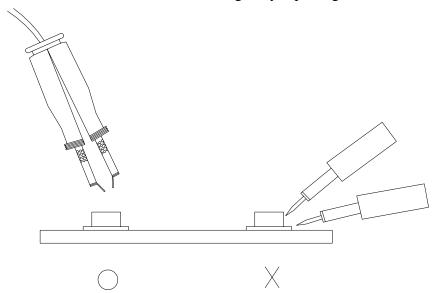

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev: 2 Page: 10 of 10