

WSP4407A

P-Ch MOSFET

General Description

The WSP4407A is the highest performance trench P-Ch MOSFET with extreme high cell density, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The WSP4407A meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available


Product Summery

BVDSS	RDSON	ID
-30V	12mΩ	-11A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

SOP-8 Pin Configuration



Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	-30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _C =25℃	Continuous Drain Current, V _{GS} @ -10V ¹	-11	А
I₀@T₀=70℃	Continuous Drain Current, V _{GS} @ -10V ¹	-10.5	А
I _{DM}	300uS Pulsed Drain Current ²	-60	A
EAS	Single Pulse Avalanche Energy ³	101	mJ
I _{AS}	Avalanche Current	-26	А
P _D @T _A =25℃	Total Power Dissipation ⁴	3.1	W
T _{STG}	Storage Temperature Range -55 to 150		°C
TJ	Operating Junction Temperature Range -55 to 150		°C

Thermal Data

Symbol	Parameter	Тур.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹		75	°C/W
R _{eJC}	Thermal Resistance Junction-Case ¹		24	°C/W

Absolute Maximum Ratings



WSP4407A

P-Ch MOSFET

Electrical Characteristics (T_J=25⁻¹C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-30			V
$\triangle BV_{DSS} / \triangle T_J$	BV _{DSS} Temperature Coefficient	Reference to $25^\circ\!\mathrm{C}$, I_D=-1mA		-0.018		V/℃
Р	Static Drain-Source On-Resistance ²	V _{GS} =-10V , I _D =-13A		12	14	mΩ
R _{DS(ON)}		V _{GS} =-4.5V , I _D =-5A		15	21	
V _{GS(th)}	Gate Threshold Voltage		-1.5	-2.0	-2.5	V
$ riangle V_{GS(th)}$	V _{GS(th)} Temperature Coefficient	$V_{GS} - V_{DS}$, $I_D - 2500A$		5.04		mV/℃
I	Drain Source Lookage Current	V_{DS} =-24V , V_{GS} =0V , T_{J} =25 $^{\circ}\mathrm{C}$			-1	
I _{DSS}	Drain-Source Leakage Current	V_{DS} =-24V , V_{GS} =0V , T _J =55 $^\circ \! \mathbb{C}$			-5	– uA
I _{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm20V$, $V_{DS}=0V$			±100	nA
gfs	Forward Transconductance	V _{DS} =-5V , I _D =-10A		18		S
Qg	Total Gate Charge (-4.5V)			31		
Q _{gs}	Gate-Source Charge	V _{DS} =-15V , V _{GS} =-4.5V , I _D =-13A		4.3		nC
Q _{gd}	Gate-Drain Charge			10		
T _{d(on)}	Turn-On Delay Time			13		
Tr	Rise Time	V_{DD} =-15V , V_{GS} =-10V , R_G =6 Ω ,		15		20
T _{d(off)}	Turn-Off Delay Time	I _D =-1A ,RL=15Ω		50		- ns -
T _f	Fall Time			29		
C _{iss}	Input Capacitance			1550	1655	
Coss	Output Capacitance	V _{DS} =-15V , V _{GS} =0V , f=1MHz		315	425	рF
C _{rss}	Reverse Transfer Capacitance			245	345	

Guaranteed Avalanche Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
EAS	Single Pulse Avalanche Energy 5	V _{DD} =-25V , L=0.5mH , I _{AS} =-26A	98			mJ

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
ls	Continuous Source Current ^{1,6}	$V_G = V_D = 0V$, Force Current			-4.0	А
I _{SM}	Pulsed Source Current ^{2,6}				-60	А
V _{SD}	Diode Forward Voltage ²	V_{GS} =0V , I_{S} =-1A , T_{J} =25 $^{\circ}$ C			-1.1	V
t _{rr}	Reverse Recovery Time	IF=-13A,dI/dt=100A/µs,Tյ=25℃		22		nS
Qrr	Reverse Recovery Charge			15		nC

Note :

1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper, t<10sec.

2.The data tested by pulsed , pulse width \leq 300us , duty cycle \leq 2%

3. The EAS data shows Max. rating . The test condition is VDD=-25V,VGS=-10V,L=0.5mH,IAS=-26A

4. The power dissipation is limited by 150 °C junction temperature

5.The Min. value is 100% EAS tested guarantee.

6. The data is theoretically the same as I_D and I_{DM} , in real applications, should be limited by total power dissipation.



WSP4407A

P-Ch MOSFET






Fig.1 Typical Output Characteristics





Fig.3 Forward Characteristics Of Reverse






Fig.2 On-Resistance v.s Gate-Source





Fig.4 Gate-Charge Characteristics



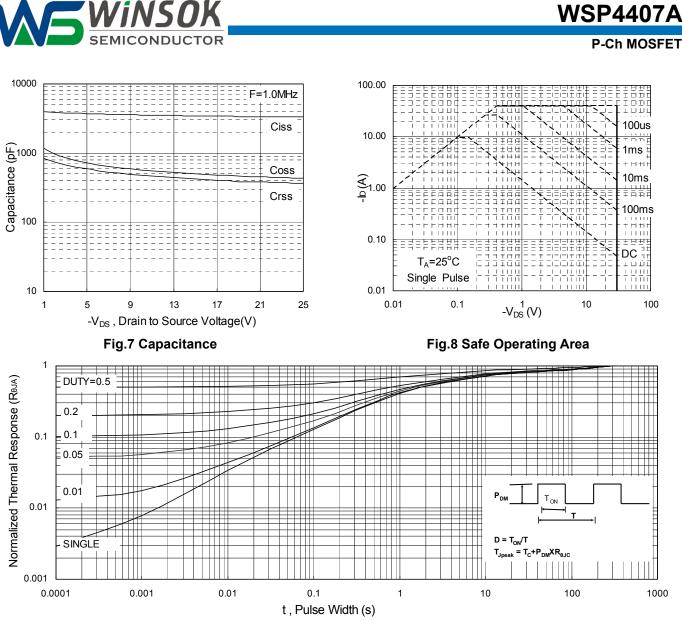




Fig.9 Normalized Maximum Transient Thermal Impedance








Fig.11 Unclamped Inductive Switching Waveform



Attention

1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.

2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.

3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

5, In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.

7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you Intend to use.

9, this catalog provides information as of Sep.2014. Specifications and information herein are subject to change without notice.