74HC85; 74HCT85 4-bit magnitude comparator Rev. 3 — 20 April 2018

Product data sheet

General description

The 74HC85; 74HCT85 is a 4-bit magnitude comparator that can be expanded to almost any length. They perform comparison of two 4-bit binary, BCD or other monotonic codes and present the three possible magnitude results at the outputs ($Q_{A>B}$, $Q_{A=B}$ and $Q_{A<B}$). The 4-bit inputs are weighted (A0 to A3 and B0 to B3), where A3 and B3 are the most significant bits. For proper compare operation the expander inputs ($I_{A>B}$, $I_{A=B}$ and $I_{A<B}$) to the least significant position must be connected as follows: $I_{A < B} = I_{A > B} = LOW$ and $I_{A=B}$ = HIGH. For words greater than 4-bits, units can be cascaded by connecting outputs $Q_{A>B}$, $Q_{A=B}$ and $Q_{A<B}$ to the corresponding inputs of the significant comparator. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC}.

Features and benefits

- Wide supply voltage range from 2.0 to 6.0 V
- CMOS low power dissipation
- High noise immunity
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- Input levels:
 - For 74HC85: CMOS level - For 74HCT85: TTL level
- Complies with JEDEC standard: no. 7A
 - JESD8C (2.7 V to 3.6 V)
 - JESD7A (2.0 V to 6.0 V)
- · ESD protection:
 - HBM JESD22-A114-A exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C

Applications

- Process controllers
- Servo-motor control





4 Ordering information

Table 1. Ordering information

Type number	Package	Package									
	Temperature range	Name	Description	Version							
74HC85D	-40 °C to +125 °C	SO16	plastic small outline package; 16 leads;	SOT109-1							
74HCT85D			body width 3.9 mm								
74HC85DB	-40 °C to +125 °C	SSOP16	plastic shrink small outline package; 16 leads;	SOT338-1							
74HCT85DB			body width 5.3 mm								
74HC85PW	-40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	SOT403-1							


5 Functional diagram

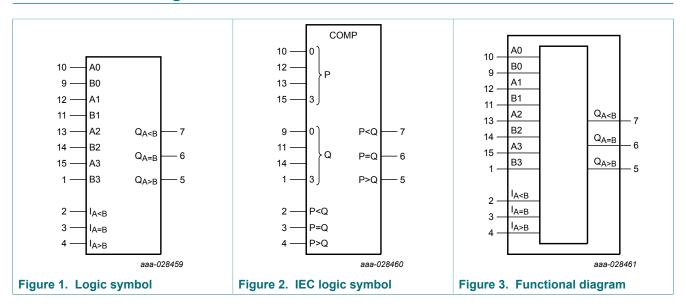

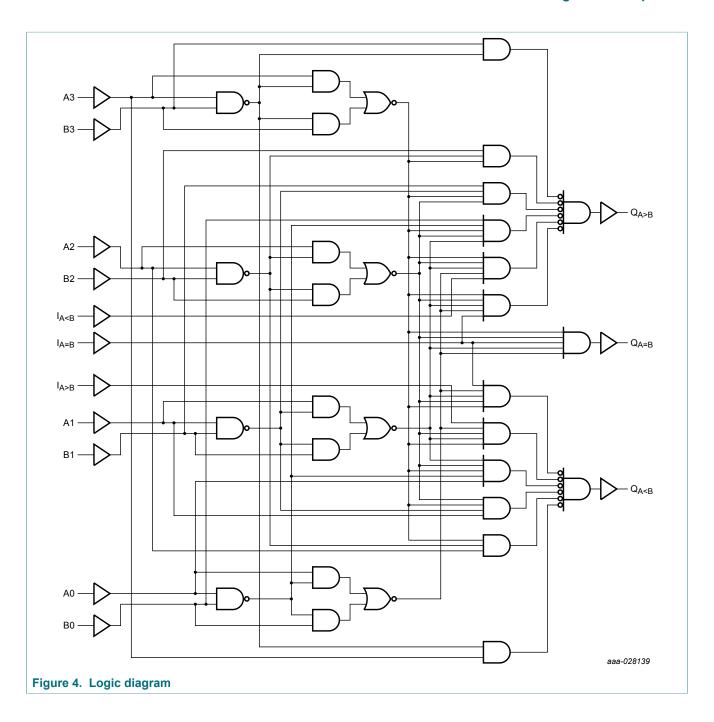

6 Pinning information

6.1 Pinning

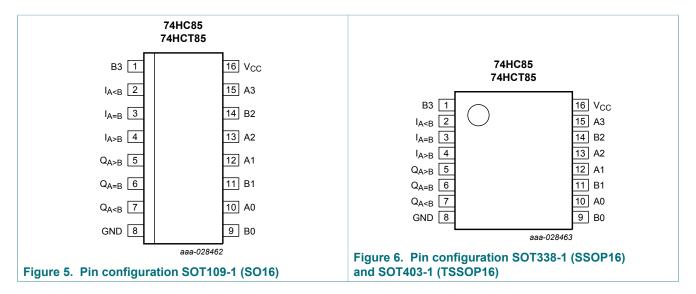

6.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
I _{A<b< sub=""></b<>}	2	A <b expansion="" input<="" td="">
I _{A=B}	3	A=B expansion input
I _{A>B}	4	A>B expansion input
$Q_{A>B}$	5	A>B output
$Q_{A=B}$	6	A=B output
$Q_{A \le B}$	7	A <b output<="" td="">
A0 to A3	10, 12, 13, 15	word A inputs
B0 to B3	9, 11, 14, 1	word B inputs
GND	8	ground (0 V)
Vcc	16	supply voltage

Functional description

Table 3. Function table

 $H = HIGH \ voltage \ level; \ L = LOW \ voltage \ level; \ X = don't \ care.$

Comparin	g inputs			Cascad	ing inputs		Outputs		
A3, B3	A2, B2	A1, B1	A0, B0	I _{A>B}	I _{A<b< sub=""></b<>}	I _{A=B}	Q _{A>B}	Q _{A<b< sub=""></b<>}	Q _{A=B}
A3 > B3	Х	Х	X	Х	Х	Х	Н	L	L
A3 < B3	X	Х	X	Х	Х	X	L	Н	L
A3 = B3	A2 > B2	Х	X	Х	X	X	Н	L	L
A3 = B3	A2 < B2	Х	X	Х	X	X	L	Н	L
A3 = B3	A2 = B2	A1 > B1	X	Х	X	X	Н	L	L
A3 = B3	A2 = B2	A1 < B1	X	Х	Х	X	L	Н	L
A3 = B3	A2 = B2	A1 = B1	A0 > B0	Х	Х	X	Н	L	L
A3 = B3	A2 = B2	A1 = B1	A0 < B0	X	X	X	L	Н	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	Н	L	L	Н	L	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	L	Н	L	L	Н	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	L	L	Н	L	L	Н
A3 = B3	A2 = B2	A1 = B1	A0 = B0	Х	X	Н	L	L	Н
A3 = B3	A2 = B2	A1 = B1	A0 = B0	Н	Н	L	L	L	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	L	L	L	Н	Н	L

Limiting values 8

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V)

		, , ,			,
Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+7	V
I _{IK}	input clamping current	$V_1 < -0.5 \text{ V or } V_1 > V_{CC} + 0.5 \text{ V}$ [1]	-	±20	mA
l _{OK}	output clamping current	$V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$ [1]	-	±20	mA
Io	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±25	mA
I _{CC}	supply current		-	50	mA
I_{GND}	ground current		-50	-	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$ [2]	-	500	mW

The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 For SO16 Packages: P_{tot} derates linearly with 8 mW/K above 70 °C.

For (T)SSOP16 Packages: P_{tot} derates linearly with 5.5 mW/K above 60 °C.

9 Recommended operating conditions

Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions		74HC85			74HCT85			
			Min	Тур	Max	Min	Тур	Max		
V _{CC}	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V	
VI	input voltage		0	-	V _{CC}	0	-	V _{CC}	V	
Vo	output voltage		0	-	V _{CC}	0	-	V _{CC}	V	
T _{amb}	ambient temperature		-40	-	+125	-40	-	+125	°C	
Δt/ΔV	input transition rise and fall rate	V _{CC} = 2.0 V	-	-	625	-	-	-	ns/V	
		V _{CC} = 4.5 V	-	1.67	139	-	1.67	139	ns/V	
		V _{CC} = 6.0 V	-	-	83	-	-	-	ns/V	

10 Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC85				,						
V _{IH}	HIGH-level input	V _{CC} = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	voltage	V _{CC} = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V _{CC} = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
V _{IL}	LOW-level input	V _{CC} = 2.0 V	-	8.0	0.5	-	0.5	-	0.5	V
	voltage	V _{CC} = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V _{CC} = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V _{OH}	HIGH-level	V _I = V _{IH} or V _{IL}								
	output voltage	I _O = -20 μA; V _{CC} = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I _O = -20 μA; V _{CC} = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I _O = -20 μA; V _{CC} = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V
		I_{O} = -4.0 mA; V_{CC} = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
		I_{O} = -5.2 mA; V_{CC} = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V
V _{OL}	LOW-level	V _I = V _{IH} or V _{IL}								
	output voltage	I_{O} = 20 μ A; V_{CC} = 2.0 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 20 μA; V _{CC} = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 20 μA; V _{CC} = 6.0 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 4.0 mA; V _{CC} = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		I _O = 5.2 mA; V _{CC} = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
l _l	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±0.1	-	±1	-	±1	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	8.0	-	80	-	160	μA
Cı	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT85										
V _{IH}	HIGH-level input voltage	V _{CC} = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V _{IL}	LOW-level input voltage	V _{CC} = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V _{OH}	HIGH-level	$V_I = V_{IH}$ or V_{IL} ; $V_{CC} = 4.5 V$								
	output voltage	I _O = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I _O = -4.0 mA	3.98	4.32	-	3.84	-	3.7	-	V
V_{OL}	LOW-level	$V_I = V_{IH}$ or V_{IL} ; $V_{CC} = 4.5 V$								
	output voltage	I _O = 20 μA	-	0	0.1	-	0.1	-	0.1	V
		I _O = 4.0 mA	-	0.15	0.26	-	0.33	-	0.4	V
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	±0.1	-	±1	-	±1	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	8.0	-	80	-	160	μΑ
ΔI _{CC}	additional supply current	per input pin; $V_1 = V_{CC} - 2.1 \text{ V}$; other inputs at V_{CC} or GND; $V_{CC} = 4.5 \text{ V}$ to 5.5 V ; $I_O = 0 \text{ A}$								
		I _{A<b< sub=""> and I_{A>B} inputs</b<>}	-	100	360	-	450	-	490	μA
		An, Bn and I _{A=B} inputs	-	150	540	-	675	-	735	μΑ
Cı	input capacitance		-	3.5	-	-	-	-	-	pF

11 Dynamic characteristics

Table 7. Dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); $C_L = 50 \text{ pF}$ unless otherwise specified; for test circuit, see Figure 8

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC85										
t _{pd}	propagation delay	An, Bn to $Q_{A>B}$; An, Bn to $Q_{A; see Figure 7$								
		V _{CC} = 2.0 V	-	63	195	-	245	-	295	ns
		V _{CC} = 4.5 V	-	23	39	-	49	-	59	ns
		V _{CC} = 6.0 V	-	18	33	-	42	-	50	ns
		V_{CC} = 5.0 V; C_L = 15 pF	-	20	-	-	-	-	-	ns
		An, Bn to Q _{A=B} ; see Figure 7								
		V _{CC} = 2.0 V	-	58	175	-	220	-	265	ns
		V _{CC} = 4.5 V	-	21	35	-	44	-	53	ns
		V _{CC} = 6.0 V	-	17	30	-	37	-	45	ns
		V_{CC} = 5.0 V; C_L = 15 pF	-	18	-	-	-	-	-	ns
		$I_{A=B}$ or $I_{A>B}$ to $Q_{A;I_{A or I_{A=B} to Q_{A>B};see Figure 7$								
		V _{CC} = 2.0 V	-	50	140	-	175	-	210	ns
		V _{CC} = 4.5 V	-	18	28	-	35	-	42	ns
		V _{CC} = 6.0 V	-	14	24	-	30	-	36	ns
		V_{CC} = 5.0 V; C_L = 15 pF	-	15	-	-	-	-	-	ns
		I _{A=B} to Q _{A=B} ; see <u>Figure 7</u>								
		V _{CC} = 2.0 V	-	39	120	-	150	-	180	ns
		V _{CC} = 4.5 V	-	14	24	-	30	-	36	ns
		V _{CC} = 6.0 V	-	11	20	-	26	-	31	ns
		V_{CC} = 5.0 V; C_L = 15 pF	-	11	-	-	-	-	-	ns
t _t	transition time	see Figure 7 [2]								
		V _{CC} = 2.0 V	-	19	75	-	95	-	110	ns
		V _{CC} = 4.5 V	-	7	15	-	19	-	22	ns
		V _{CC} = 6.0 V	-	6	13	-	16	-	19	ns
C _{PD}	power dissipation capacitance	per package; V_1 = GND to V_{CC} [3]	-	18	-	-	-	-	-	pF

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HCT85			,			,		,		
t _{pd}	propagation delay	An, Bn to $Q_{A>B}$; An, Bn to $Q_{A; see Figure 7$								
		V _{CC} = 4.5 V	-	26	44	-	55	-	66	ns
		V _{CC} = 5.0 V; C _L = 15 pF	-	22	-	-	-	-	-	ns
		An, Bn to Q _{A=B} ; see Figure 7								
		V _{CC} = 4.5 V	-	24	40	-	50	-	60	ns
		V _{CC} = 5.0 V; C _L = 15 pF	-	20	-	-	-	-	-	ns
		$I_{A=B}$ or $I_{A>B}$ to $Q_{A;I_{A or I_{A=B} to Q_{A>B};see Figure 7$								
		V _{CC} = 4.5 V	-	18	31	-	39	-	47	ns
		V _{CC} = 5.0 V; C _L = 15 pF	-	15	-	-	-	-	-	ns
		I _{A=B} to Q _{A=B} ; see <u>Figure 7</u>								
		V _{CC} = 4.5 V	-	18	31	-	39	-	47	ns
		V _{CC} = 5.0 V; C _L = 15 pF	-	15	-	-	-	-	-	ns
t _t	transition time	V_{CC} = 4.5 V; see <u>Figure 7</u> [2]	-	7	15	-	19	-	22	ns
C _{PD}	power dissipation capacitance	per package; [3] V _I = GND to V _{CC} - 1.5 V	-	20	-	-	-	-	-	pF


f_o = output frequency in MHz;

 Σ (C_L × V_{CC}² × f_o) = sum of outputs; C_L = output load capacitance in pF;

V_{CC} = supply voltage in V.

^[1] t_{pd} is the same as t_{PHL} and t_{PLH} . [2] t_{t} is the same as t_{THL} and t_{TLH} . [3] C_{PD} is used to determine the dynamic power dissipation (P_{D} in μ W). $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{t} + \Sigma (C_{L} \times V_{CC}^{2} \times f_{o})$ where: $f_{t} = \text{input frequency in MHz}$

11.1 Waveforms and test circuit

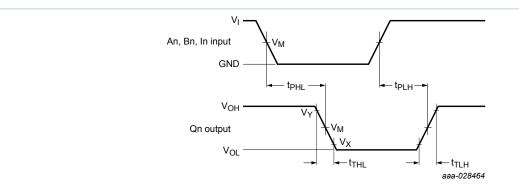


Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical voltage output levels that occur with the output load.

Figure 7. Word A inputs (An), word B inputs (Bn) and expansion inputs (In) to the outputs (Qn) propagation delays and the output transition times

Table 8. Measurement points

Type Input			Output				
	V _I	V _M	V _M	V _X	V _Y		
74HC85	V _{CC}	0.5V _{CC}	0.5V _{CC}	0.1 V _{CC}	0.9 V _{CC}		
74HCT85	3 V	1.3 V	1.3 V	0.1 V _{CC}	0.9 V _{CC}		



Test data is given in Table 9.

Definitions test circuit:

 R_T = termination resistance should be equal to output impedance Z_o of the pulse generator.

 C_L = load capacitance including jig and probe capacitance.

Figure 8. Test circuit for measuring switching times

74HC_HCT85


All information provided in this document is subject to legal disclaimers.


© Nexperia B.V. 2018. All rights reserved.

Table 9. Test data


Туре	Input Lo		Load	Test
	V_l t_r, t_f		CL	
74HC85	V _{CC}	6.0 ns	15 pF, 50 pF	t _{PLH} , t _{PHL}
74HCT85	3.0 V	6.0 ns	15 pF, 50 pF	t _{PLH} , t _{PHL}

12 Application information

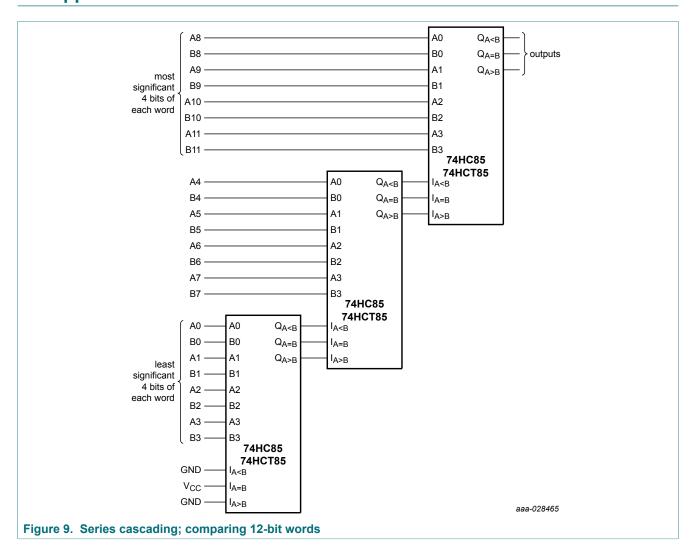

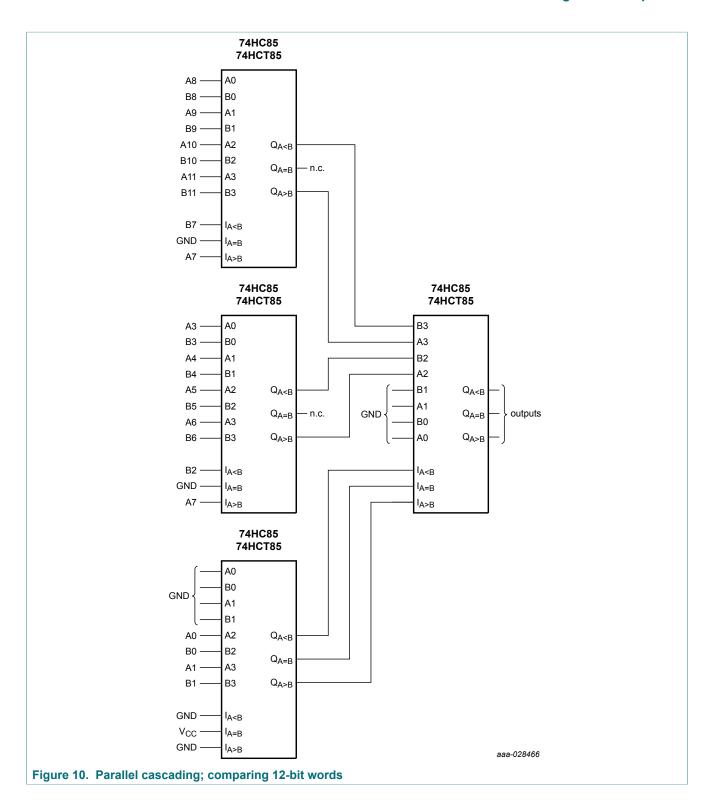

13 Package outline

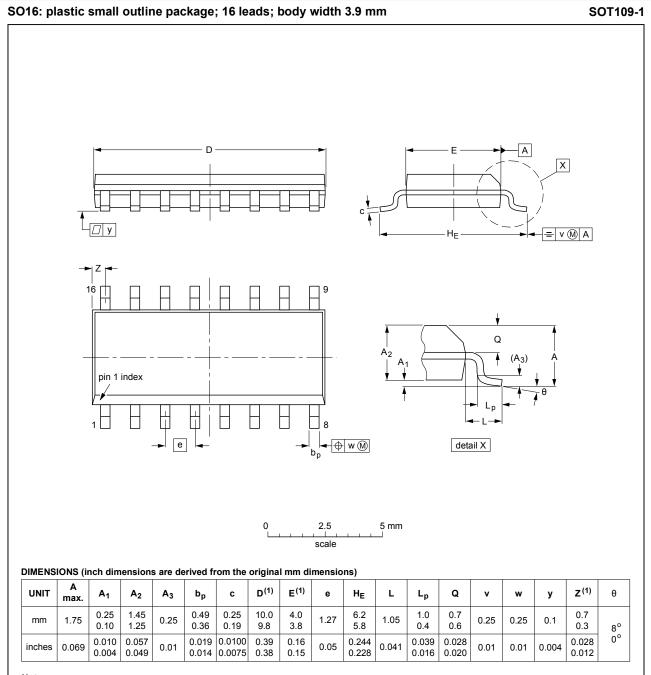

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE		REFERENCES				ISSUE DATE
VERSION	IEC	JEDEC	JEITA	PROJECTION	135UE DATE	
SOT109-1	076E07	MS-012				99-12-27 03-02-19

Figure 11. Package outline SOT109-1 (SO16)

74HC_HCT8

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2018. All rights reserved.


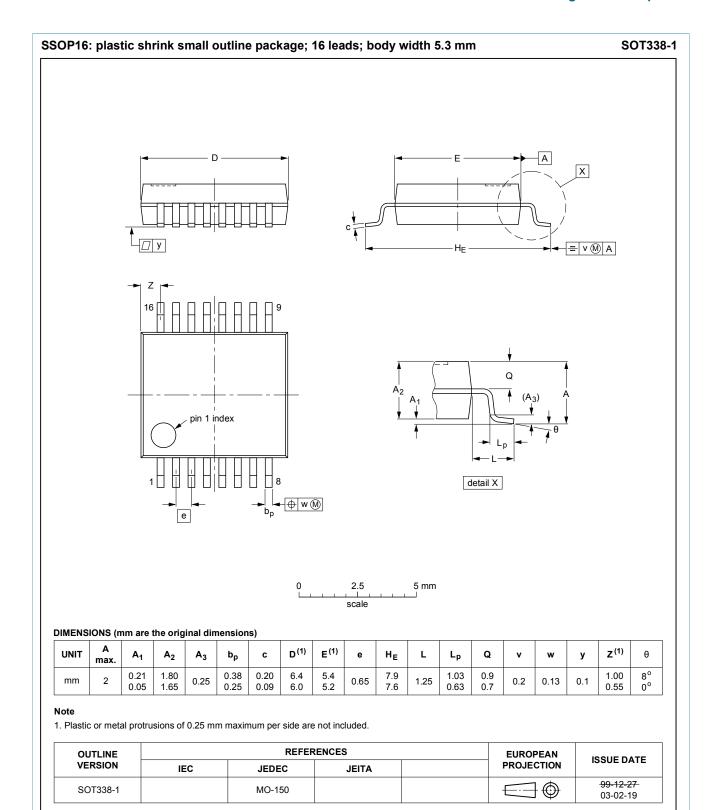


Figure 12. Package outline SOT338-1 (SSOP16)

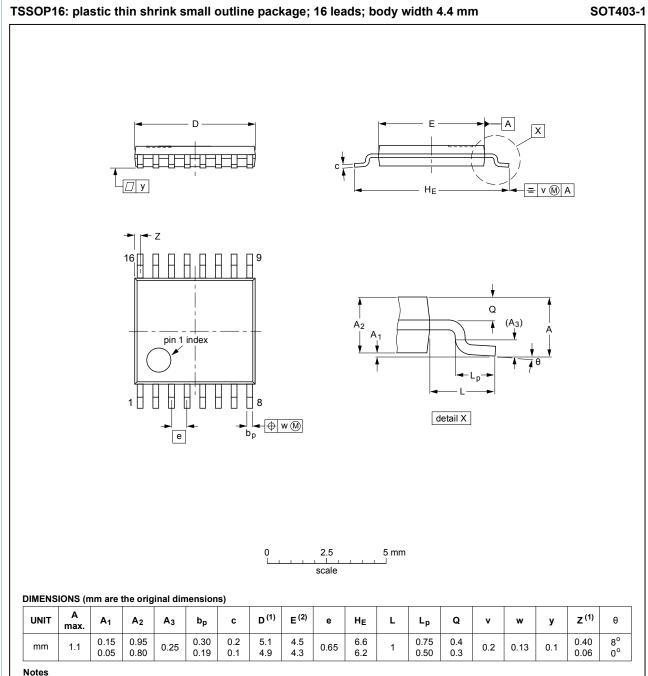

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

	OUTLINE VERSION	REFERENCES			EUROPEAN	ISSUE DATE	
		IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
	SOT403-1		MO-153				99-12-27 03-02-18

Figure 13. Package outline SOT403-1 (TSSOP16)

14 Abbreviations

Table 10. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

15 Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT85 v.3	20180420	Product data sheet	-	74HC_HCT85 v.2
 Modifications: The format of this data sheet has been redesigned to comply with the identity guideli Nexperia. Legal texts have been adapted to the new company name where appropriate. 				, 0
74HC_HCT85 v.2	19901201	Product specification	-	74HC_HCT85 v.1
74HC_HCT85 v.1	19901201	Product specification	-	-

16 Legal information

16.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions". [2] [3]
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

16.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support. life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2018. All rights reserved.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

74HC85; 74HCT85

4-bit magnitude comparator

Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Ordering information	2
5	Functional diagram	2
6	Pinning information	4
6.1	Pinning	
6.2	Pin description	4
7	Functional description	5
8	Limiting values	5
9	Recommended operating conditions	6
10	Static characteristics	
11	Dynamic characteristics	8
11.1	Waveforms and test circuit	
12	Application information	11
13	Package outline	
14	Abbreviations	
15	Revision history	16
16	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.