

June 2015

## Multilayer Band Pass Filter

For 4900-5850MHz

## DEA255375BT-2076A1

2.5x2.0mm [EIA 1008]\*

\* Dimensions Code JIS[EIA]



# The products in this catalog will be or have been stopped production

Discontinue Issue Date	Jun. 3, 2022		
Last Purchase Order Date	Mar. 31, 2023		
Last Shipment Date	Mar. 31, 2024		

Please refer to our Web site about replacement information.



**Conformity to RoHS Directive** 

## **Multilayer Band Pass Filter**

For 4900-5850MHz


## **DEA255375BT-2076A1**

## SHAPES AND DIMENSIONS 2.50±0.20 [Top view] 1.00max. $2.00\pm0.20$ (2) Marking [Bottom view] 0.25±0.15 Terminal functions 0.20±0.10 GND GND Dimensions in mm

#### ■ RECOMMENDED LAND PATTERN

# 2.00 1.40 0.60 Dimensions in mm

#### **EVALUATION BOARD**



ORAMS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



## DEA255375BT-2076A1

#### **ELECTRICAL CHARACTERISTICS**

Item	Frequency Range (MHz)	Min.	Тур.		Max.
Insertion Loss (dB)	4900 to 5850	_	0.70		1.2
	4900 to 5850	_	_/		1.5 (-40 to +85°C)
Return Loss (dB)	4900 to 5850	9.54	19.5		/-
Ripple (dB)	4900 to 5850	_	_		1.0
Attenuation (dB)	824 to 1910	50 (-40 to +85°C)	<b>/</b> - <		_
	9800 to 11700	15	22.7		_
Characteristic Impedance (Ω)			50 (Nomina	al)	

<sup>·</sup> Ta: +25±5°C

#### **■TEMPERATURE RANGE**

Operating temperature	Storage temperature	7
(°C)	(°C)	
-40 to +85	-40 to +85	




All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.


## DEA255375BT-2076A1

#### **■ FREQUENCY CHARACTERISTICS**


#### **□INSERTION LOSS**



#### **ATTENUATION**




#### □RETURN LOSS



<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.

#### ■ RECOMMENDED REFLOW PROFILE

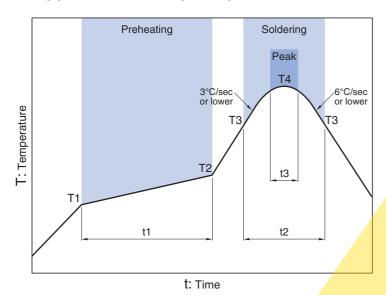

Preheating			Soldering			
		Critical zone (T3 to T4)		Peak		
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	Т3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120s	sec 240 to 260°C	30sec max.

\*t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



#### REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

#### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

### **⚠** REMINDERS

The products listed on this catalog are intended for use in general electronic equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.