MARKING DIAGRAM

7M M=

# **ESD** Protection Diode

# Low Capacitance ESD Protection Diode for High Speed Data Line

# **ESD7104**

The ESD7104 surge protection is designed to protect high speed data lines from ESD. Ultra-low capacitance and low ESD clamping voltage make this device an ideal solution for protecting voltage sensitive high speed data lines. The flow-through style package allows for easy PCB layout and matched trace lengths necessary to maintain consistent impedance between high speed differential lines such as USB 3.0 and HDMI.

### Features

- Low Capacitance (0.3 pF Typical, I/O to GND)
- Low ESD Clamping Voltage
- Protection for the Following IEC Standards: IEC 61000-4-2 (Level 4)
- UL Flammability Rating of 94 V-0
- SZESD7104MTWTAG Wettable Flank Package for optimal Automated Optical Inspection (AOI)
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and **PPAP** Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### **Typical Applications**

- USB 3.0
- eSATA 3.0
- Thunderbolt (Light Peak)
- HDMI 1.3/1.4
- Display Port

#### MAXIMUM RATINGS (T<sub>.1</sub> = 25°C unless otherwise noted)

		,	
Rating	Symbol	Value	Unit
Operating Junction Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	°C
Lead Solder Temperature – Maximum (10 Seconds)	ΤL	260	°C
IEC 61000-4-2 Contact (ESD) IEC 61000-4-2 Air (ESD)	ESD ESD	±15 ±15	kV kV

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

See Application Note AND8308/D for further description of survivability specs.



7M


Μ

#### = Specific Device Code (tbd)

- = Date Code
- = Pb-Free Package


(Note: Microdot may be in either location)

UDFN10



AAC = Specific Device Code М = Date Code

#### **PIN CONFIGURATION** AND SCHEMATIC

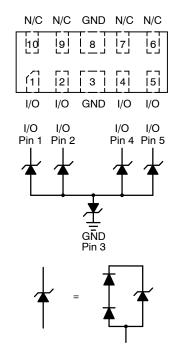

# **ORDERING INFORMATION**

See detailed ordering, marking and shipping information in the package dimensions section on page 9 of this data sheet.

ELECTRICAL CHARACTERISTICS	$(T_A = 25^{\circ}C \text{ unless otherwise specified})$
----------------------------	--

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Reverse Working Voltage	V <sub>RWM</sub>	I/O Pin to GND			5.0	V
Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> = 1 mA, I/O Pin to GND				V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> = 5 V, I/O Pin to GND			1.0	μA
Clamping Voltage (Note 1)	V <sub>C</sub>	I <sub>PP</sub> = 1 A, I/O Pin to GND (8 x 20 μs pulse)		10	V	
Clamping Voltage (Note 2)	V <sub>C</sub>	IEC61000-4-2, ±8 KV Contact	See Figures 1 and 2		V	
Clamping Voltage (Note 3)	V <sub>C</sub>	$\begin{array}{c} I_{PP} = \pm 8 \ A \\ I_{PP} = \pm 16 \ A \end{array} \begin{array}{c} 14.1 \\ 19.5 \end{array}$			V	
Junction Capacitance	CJ	V <sub>R</sub> = 0 V, f = 1 MHz between I/O Pins 0.2 0.3		0.3	pF	
Junction Capacitance	CJ	V <sub>R</sub> = 0 V, f = 1 MHz between I/O Pins and GND 0.3 0.35		0.35	pF	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Surge current waveform per Figure 5.

Surge current waveform per righte 5.
 For test procedure see Figures 3 and 4 and application note AND8307/D.
 ANSI/ESD STM5.5.1 – 2008 Electrostatic Discharge Sensitivity Testing using Transmission Line Pulse (TLP) Model. TLP conditions: Z<sub>0</sub> = 50 Ω, t<sub>p</sub> = 100 ns, t<sub>r</sub> = 4 ns, averaging window; t<sub>1</sub> = 30 ns to t<sub>2</sub> = 60 ns.




Figure 1. IEC61000-4-2 +8 KV Contact **Clamping Voltage** 






Figure 2. IEC61000-4-2 -8 KV Contact **Clamping Voltage** 

#### IEC 61000-4-2 Spec.

Level	Test Volt- age (kV)	First Peak Current (A)	Current at 30 ns (A)	Current at 60 ns (A)
1	2	7.5	4	2
2	4	15	8	4
3	6	22.5	12	6
4	8	30	16	8





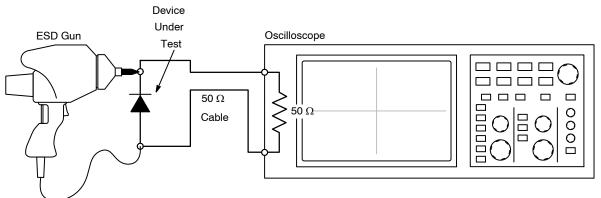



Figure 4. Diagram of ESD Clamping Voltage Test Setup


#### The following is taken from Application Note AND8308/D – Interpretation of Datasheet Parameters for ESD Devices.


#### **ESD Voltage Clamping**

For sensitive circuit elements it is important to limit the voltage that an IC will be exposed to during an ESD event to as low a voltage as possible. The ESD clamping voltage is the voltage drop across the ESD protection diode during an ESD event per the IEC61000–4–2 waveform. Since the IEC61000–4–2 was written as a pass/fail spec for larger

systems such as cell phones or laptop computers it is not clearly defined in the spec how to specify a clamping voltage at the device level. **onsemi** has developed a way to examine the entire voltage waveform across the ESD protection diode over the time domain of an ESD pulse in the form of an oscilloscope screenshot, which can be found on the datasheets for all ESD protection diodes. For more information on how **onsemi** creates these screenshots and how to interpret them please refer to AND8307/D.

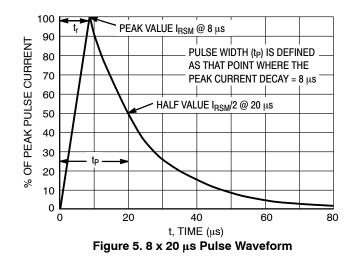





#### Transmission Line Pulse (TLP) Measurement

Transmission Line Pulse (TLP) provides current versus voltage (I–V) curves in which each data point is obtained from a 100 ns long rectangular pulse from a charged transmission line. A simplified schematic of a typical TLP system is shown in Figure 8. TLP I–V curves of ESD protection devices accurately demonstrate the product's ESD capability because the 10s of amps current levels and under 100 ns time scale match those of an ESD event. This is illustrated in Figure 9 where an 8 kV IEC 61000–4–2 current waveform is compared with TLP current pulses at 8 A and 16 A. A TLP I–V curve shows the voltage at which the device turns on as well as how well the device clamps voltage over a range of current levels.




Figure 8. Simplified Schematic of a Typical TLP System

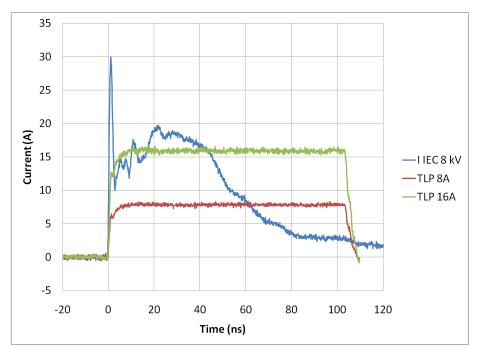
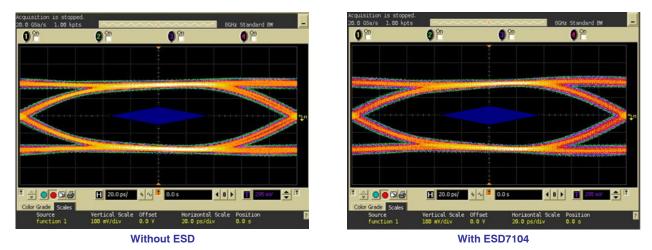


Figure 9. Comparison Between 8 kV IEC 61000-4-2 and 8 A and 16 A TLP Waveforms






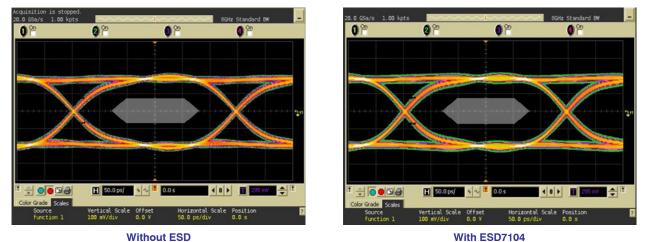



Figure 11. HDMI1.4 Eye Diagram with and without ESD7104. 3.4 Gb/s, 400 mV<sub>PP</sub>



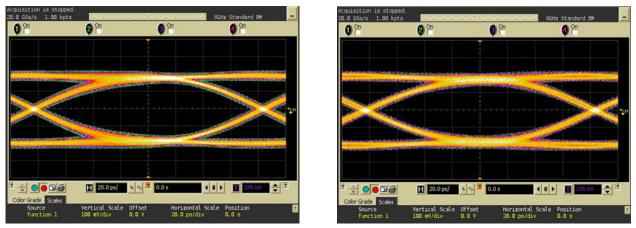

With ESD7104

Figure 12. ESATA3.0 Eye Diagram with and without ESD7104. 6 Gb/s, 400 mV\_{PP}

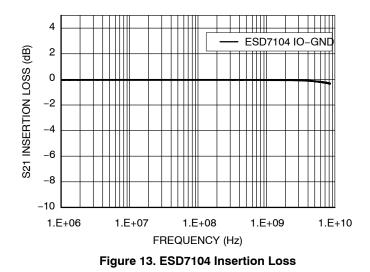

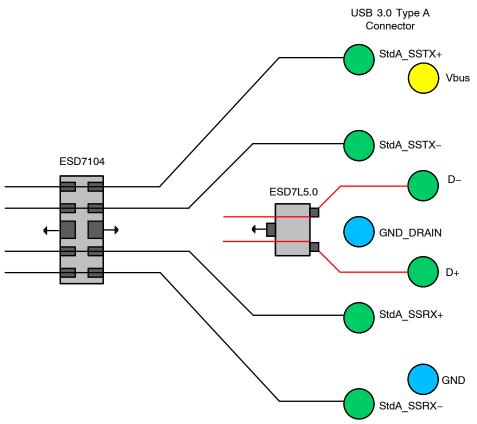
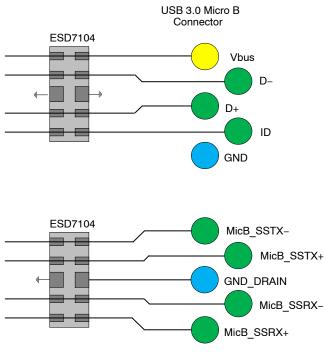


Figure 14. USB3.0 Standard A Connector Layout Diagram





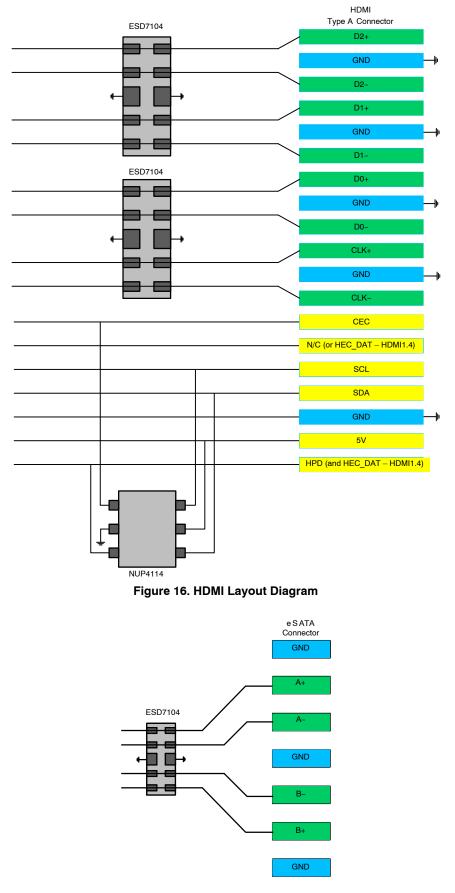


Figure 17. eSATA Layout Diagram

#### **DEVICE ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
ESD7104MUTAG	7M	UDFN10 (Pb-Free)	3000 / Tape & Reel
SZESD7104MUTAG	7M	UDFN10 (Pb-Free)	3000 / Tape & Reel
SZESD7104MTWTAG	AAC	WDFNW10 (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.




	WDFNW10 2.5x1.0, 0.5P CASE 515AH ISSUE B				
				DATE 03	AUG 2020
k₽	NDTES	ı			
		MENSIONIN ME Y14.5M,		ERANCING	PER
		ONTROLLIN	G DIMENSI	IN: MILLIM	ETERS
				ES TO PLA	
TOP VIEW		RMINALS A 5 AND 0.30			
		DPLANARIT			
DETAIL B		D AS WELI	L AS THE	TERMINALS	S.
	DE	HIS DE∨IC SIGN FEAT IRMATI⊡N D	URES TO A	AID IN FIL	
	ATING		MI	LLIMETE	RS
NDTE 4 SIDE VIEW C PLA	4NE .	DIM	MIN.	NDM.	MAX.
		Α	0.70	0.75	0.80
		A1	0.00		0.05
		A3	(	0.20 REF	-
<del>nůůuů</del> ,	ALTERNATE	A4	0.10		
a 88		b	0.15	0.20	0.25
		b2	0.35	0.40	0.45
BOTTOM VIEW		D	2.40	2.50	2.60
2x 0.45 0.70		E	0.90	1.00	1.10
		e		0.50 BSC	
		L	0.30	0.35	0.40
		L3			0.10
RECOMMENDED	SURFACE ALTERNATE CONSTRUCTION		05115		
MOUNTING FOOTPRINT * For additional information on our Pb-Free strategy and	DETAIL B	МА	GENEF RKING DI		
soldering details, please download the DN Seniconductor Soldering and Mounting Techniques Reference Manual, SDLDERRH/D.					
			XXXM	1	
			0		

0 XX = Specific Device Code M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON08744H	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	DESCRIPTION: WDFNW10 2.5x1.0, 0.5P				
ON Semiconductor and  and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.					



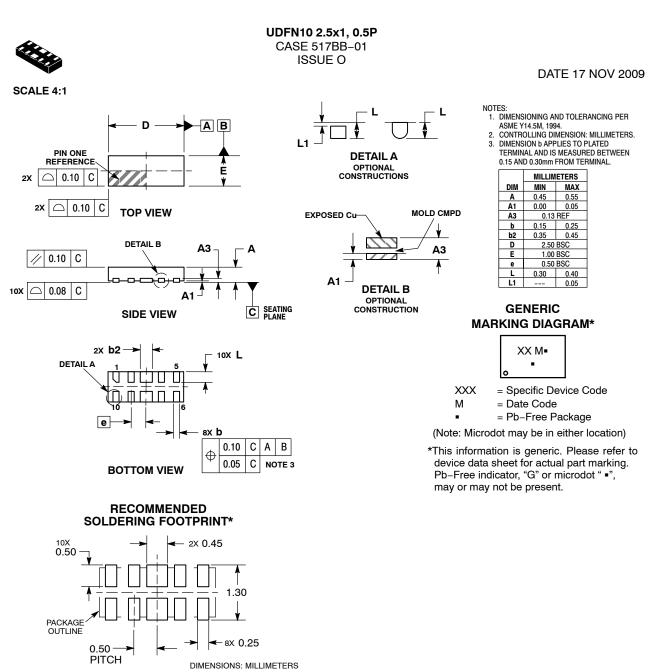

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON47059E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	UDFN10 2.5X1, 0.5P PAGE 1 OF		PAGE 1 OF 1	
ON Semiconductor and  and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaimes any and all liability including without limitation appeared and the application of the application or convert any license under its patent rights nor the				

rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative