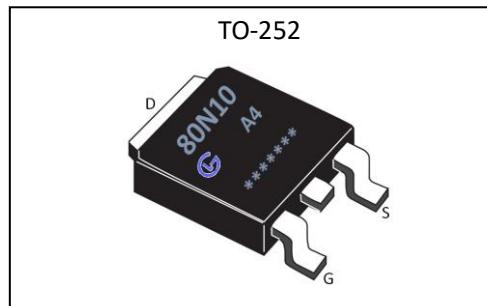


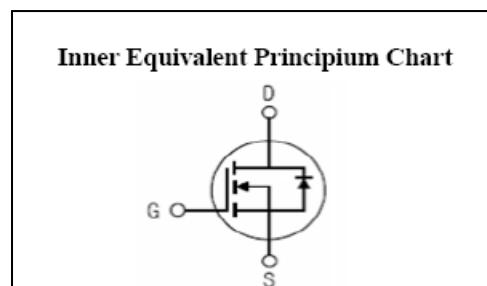
GL Silicon N-Channel Power MOSFET
General Description:

The GL80N10A4 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications. The package form is TO-252, which accords with the RoHS standard.

V_{DSS}	100	V
I_D	80	A
P_D	100	W
$R_{DS(ON)type}$	7.2	$m\Omega$


Features:

- $R_{DS(ON)} < 8.5m\Omega$ @ $V_{GS}=10V$ (Typ7.2mΩ)
- High density cell design for ultra low $R_{ds(on)}$
- Fully characterized avalanche voltage and current
- Excellent package for good heat dissipation


Applications:

- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

Absolute ($T_c = 25^\circ C$ unless otherwise specified):

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-to-Source Voltage	100	V
I_D	Continuous Drain Current	80	A
I_{DM}	Pulsed Drain Current	320	A
V_{GS}	Gate-to-Source Voltage	± 20	V
P_D	Power Dissipation	125	W
	Derating factor	0.8	$W/^\circ C$
E_{AS}	Single pulse avalanche energy ^{a5}	320	mJ
T_J, T_{stg}	Operating Junction and Storage Temperature Range	175, -55 to 175	$^\circ C$



GL80N10A4

无锡光磊电子科技有限公司

GL Silicon N-Channel Power MOSFET

Electrical Characteristics ($T_c = 25^\circ C$ unless otherwise specified):

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	100	--	--	V
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=100V, V_{GS}=0V, T_a=25^\circ C$	--	--	1.0	μA
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=+20V$	--	--	0.1	μA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-20V$	--	--	-0.1	μA

ON Characteristics ^{a3}						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V, I_D=40A$	--	7.2	8.5	$m\Omega$
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	1.7	2.5	V

Pulse width $t_p \leq 380\mu s, \delta \leq 2\%$

Dynamic Characteristics ^{a4}						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
g_{fs}	Forward Transconductance	$V_{DS}=10V, I_D=40A$	40	--	--	S
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=50V$	--	4200	--	pF
C_{oss}	Output Capacitance	$f=1.0MHz$	--	354	--	
C_{rss}	Reverse Transfer Capacitance		--	23	--	

Resistive Switching Characteristics ^{a4}						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$V_{DD}=50V, I_D=40A$	--	15	--	ns
t_r	Rise Time		--	10	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	41	--	
t_f	Fall Time		--	6	--	
Q_g	Total Gate Charge	$V_{DD}=50V, I_D=40A$	--	65	--	nC
Q_{gs}	Gate to Source Charge		--	15.3	--	
Q_{gd}	Gate to Drain ("Miller")Charge		--	9	--	

GL Silicon N-Channel Power MOSFET
Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I_S	Continuous Source Current ^{a2} (Body Diode)		--	--	80	A
V_{SD}	Diode Forward Voltage ^{a3}	$I_S=80A, V_{GS}=0V$	--	--	1.2	V

Symbol	Parameter	Typ.	Units
R_{eJC}	Junction-to-Case ^{a2}	1.25	°C/W

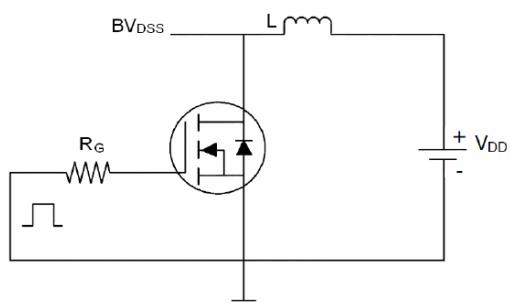
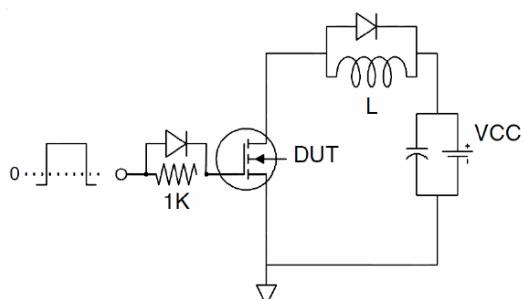
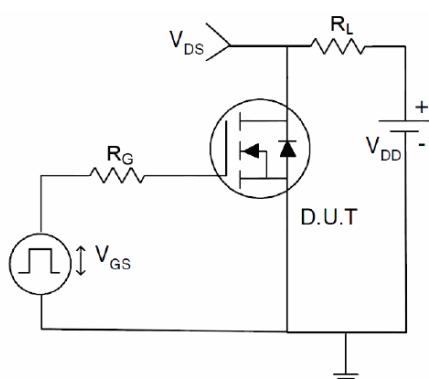
^{a1}: Repetitive Rating: Pulse width limited by maximum junction temperature.

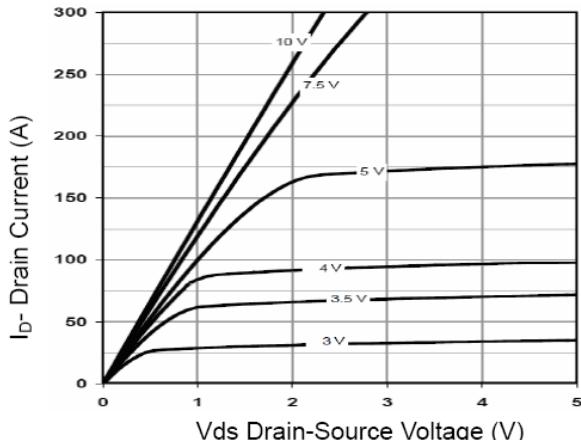
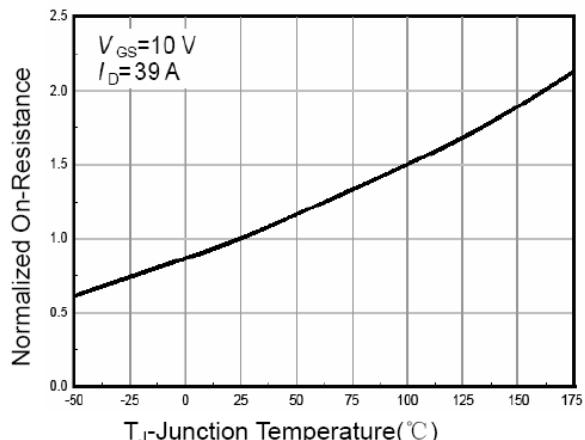
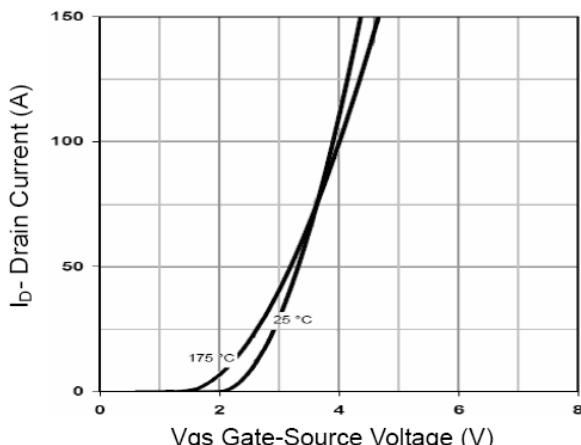
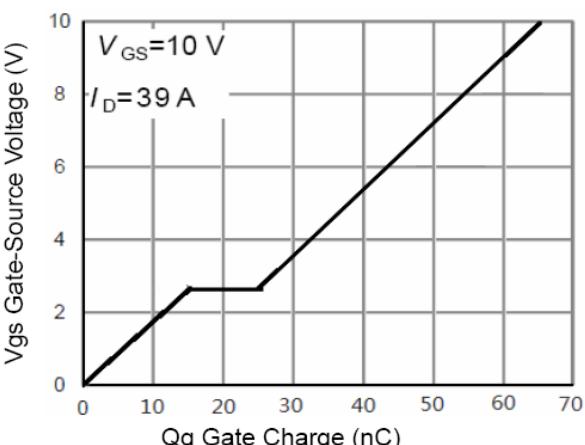
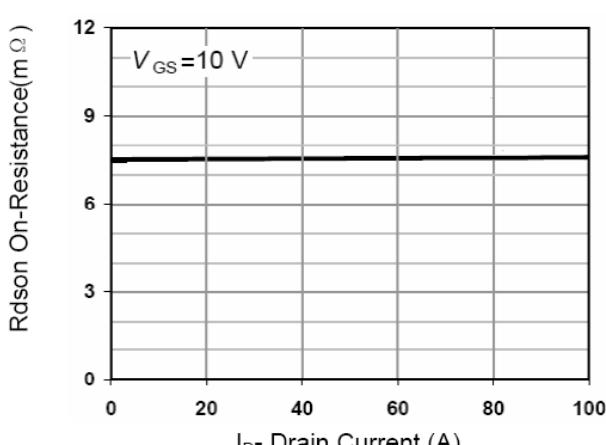
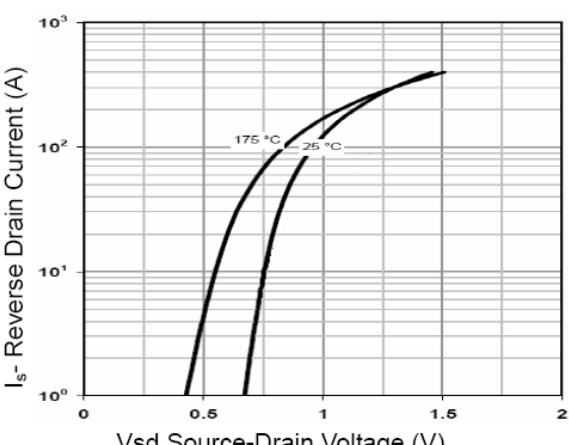
^{a2}: Surface Mounted on FR4 Board, $t \leq 10\text{sec}$.

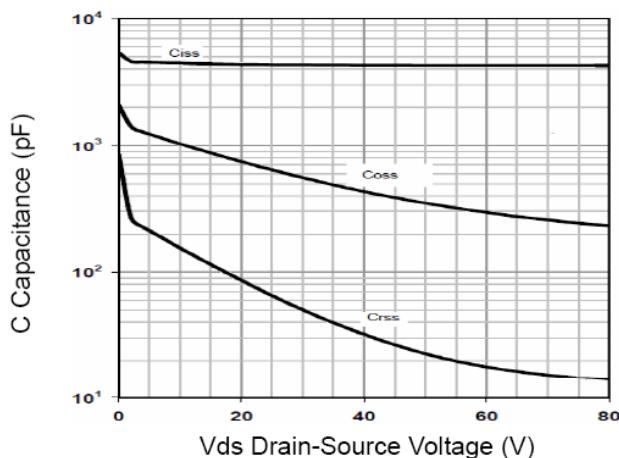
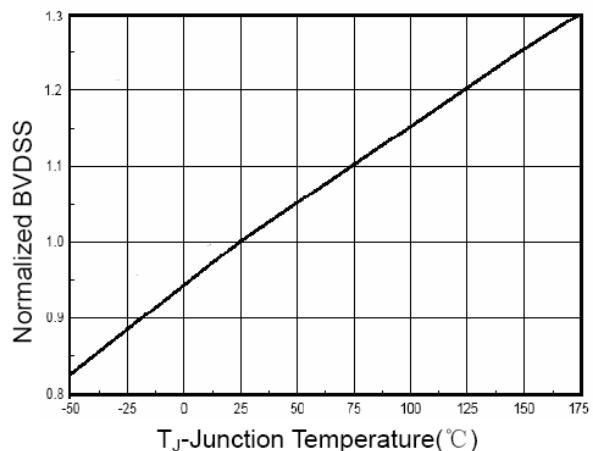
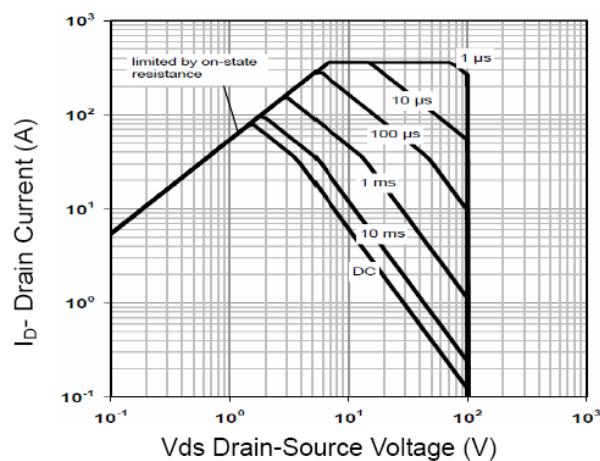
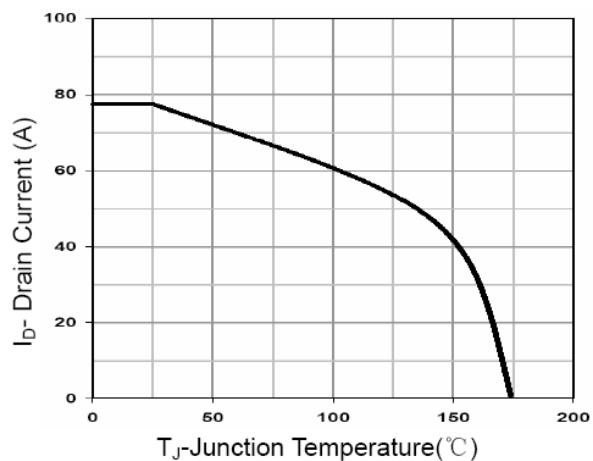
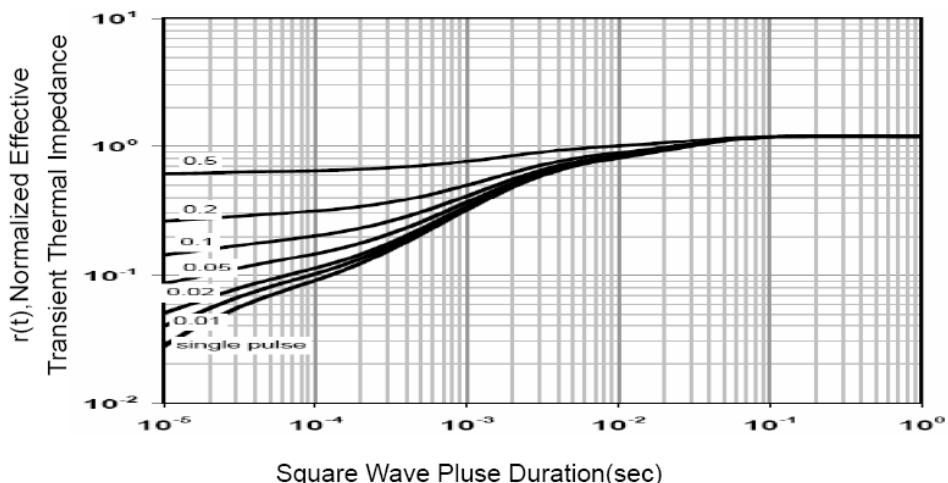
^{a3}: Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

^{a4}: Guaranteed by design, not subject to production

^{a5}: EAS condition: $T_j=25^\circ\text{C}, V_{DD}=50\text{V}, V_G=10\text{V}, L=0.5\text{mH}, R_g=25\Omega$

Test circuit
1) EAS test Circuit

2) Gate charge test Circuit

3) Switch Time Test Circuit


GL Silicon N-Channel Power MOSFET
Characteristics Curve:

Figure 1 Output Characteristics

Figure 4 R_{DSON} -JunctionTemperature

Figure 2 Transfer Characteristics

Figure 5 Gate Charge

Figure 3 R_{DSON} - Drain Current

Figure 6 Source- Drain Diode Forward

GL Silicon N-Channel Power MOSFET

Figure 7 Capacitance vs Vds

Figure 9 BV_{DSS} vs Junction Temperature

Figure 8 Safe Operation Area

Figure 10 Current De-rating

Figure 11 Normalized Maximum Transient Thermal Impedance

TEL:0755-23068119