

承 认 书

REV: A

SPECIFICATION FOR APPROVAL

客 户
CUSTOMER品 名
DESCRIPTION

磁环电感 (卧式)

料 号
PART NO.T040125 - 10 μ H日 期
DATE.

2018-05-15

确认后请签名，并返回一份！

	核 准	确 认	制 表
承制方	唐勇	张海燕	吴霞

	全 部 承 认	部 分 承 认	修 订 承 认
承认方			

东莞市捷森电子有限公司

JS Electronic Co.,Ltd.

地址：东莞市厚街镇汀山村明生工业园

ADDRESS:Tingshan Baida Industrial Park,Houjie Town Donguan City



TEL: 0769-81226736

FAX:0769-81226736

E-mail:15817726933@163.com

SPECIFICATION FOR APPROVAL**1 OF 3**

CUSTOMER		PART NO	T040125- 10 μ H	DATE	2018-05-15
----------	--	---------	---------------------	------	------------

1.CONFIGURATION DIMENSIONS (UNIT: mm)

A	13.0 MAX
B	6.5MAX
C	8.0 \pm 1.0
D	5.0 \pm 0.5

备注: 1.以上尺寸单位均为(mm)
2.套 UL 套管

2.ELECTRIC CHARACTERISTICS:

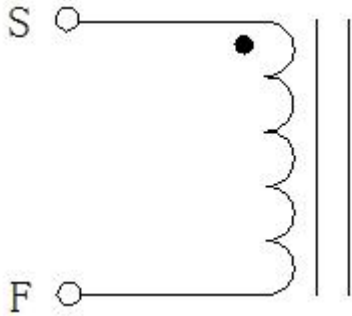
NO.	Parameter		Specification	Conditions	Test instruments
1	L	S-F	10 μ H \pm 20%	1KHz/0.25Vac	LCR 1062
2	DCR	S-F	17 m Ω MAX	25 $^{\circ}$ C	VR131

核准 APPROVED BY	确认 CHECKED BY	制表 DRAWN BY
唐勇	张海燕	吴霞

SPECIFICATION FOR APPROVAL 20F 3

CUSTOMER		PART NO	T040125- 10 μ H	DATE	2018-05-15
----------	--	---------	---------------------	------	------------

3.WINDING SPECIFICATION:



NO.	Winding	Terminal	No. of Turns	Wire	Remark
1	N1	S-F	11.5TS(REF)	2UEW \varnothing 0.65mm*1p	均绕

4.MATERIAL LIST:

NO	DESCRIPTION	MATERIAL	MANUFACTURER	U.L NO
1	CORE	IRON CORE CS040125	MAI XU ELECTRIC CO.,LTD	
2	WIRE	WIRE TYPE UEW-2 155 $^{\circ}$ C	XI LONG ELECTRIC CO.,LTD	
3	SOLDER	G107H	QIAN DAO ELECTRIC CO.,LTD	

核准 APPROVED BY	确认 CHECKED BY	制表 DRAWN BY
唐勇	张海燕	吴霞

SPECIFICATION FOR APPROVAL**3 OF 3**

CUSTOMER		PART NO	T040125- 10 μ H	DATE	2018-05-15
----------	--	---------	---------------------	------	------------

Test report

SPEC	ELECTRICAL CHARACTERISTIC			MECHANICAL DIMENSIONS			
	L	DCR		A	B	C	D
	μ H	m Ω		mm	mm	mm	mm
	10	17		13.0	6.5	8.0	5.0
	$\pm 20\%$	MAX		MAX	MAX	± 1.0	± 0.5
1	10.2	14.3		12.15	5.76	8.23	5.06
2	10.1	13.6		12.17	5.79	8.16	5.08
3	10.2	14.5		12.16	5.78	8.33	5.12
4	10.4	13.9		12.18	5.73	8.15	5.08
5	10.2	14.5		12.16	5.82	8.02	5.13
6	10.0	14.6		12.17	5.75	8.23	5.14
7	9.9	14.2		12.15	5.76	8.35	5.16
8	10.2	13.7		12.14	5.77	8.08	5.07
9	10.3	13.8		12.13	5.79	8.11	5.08
10	10.3	13.9		12.15	5.76	8.26	5.12

Ambient Temperature:25 $^{\circ}$ C

Humidity:70%

Characteristics:

1.Current rating :Based on temperature rise not exceed 20 $^{\circ}$ C2.Operating temperature : -20 $^{\circ}$ C to 80 $^{\circ}$ C.

核准 APPROVED BY	确认 CHECKED BY	制表 DRAWN BY
唐勇	张海燕	吴霞