

客 户

CUSTOMER

H286



承 認 書
SPECIFICATION FOR
APPROVAL

客 户 品 名

CUSTOMER NAME.

料 号

PART NO.

本 公 司 品 名

OURS PART NAME.

VEUU9.8-470U-V

料 号

PART NO.

FIFIUU9.8-42

工程出图

ENGINEERING DRAWING

發行

MADE

檢查

CHECKED

承認

APPROVED

日期

DATE: 2022 年 12 月 17 日

承認印

CUSTOMER APPROVE

采 购

工 程

品 保

承认结果：请予以认证，提出修改意见或确认后签回，如未签回下订单，则是视为默认。

所签回的传真件及复印件均视为具有法律效力



深圳市千代源电子有限公司

SHEN ZHEN VOLUME SOURCE ELECTRONICS CO.,LTD.

地址：东莞市凤岗天安数码城 T5-N4 栋 16 楼。

Tel: 0769-89891993

Fax: 0769-89891993-806

HOME: <http://www.volumesz.com.cn>

承 认 书 番 号

SPEC NO. VE-H286-20221217001





样品规格书变更履历表 SPECIFICATION ALTERATION HISTORY RECORDS		承认书番号 SPEC NO. VE-H286-20221217001
No. DATE	变 更 内 容 及 理 由 Alteration contents and reason	确认人/签名 Confirm
No. 1 2022-12-17	第一次制定	卢永汉
No. 2		
No. 3		
No. 4		
No. 5		
No. 6		
No. 7		
No. 8		
No. 9		
No. 10		
No. 11		
No. 12		

SPECIFICATION FOR APPROVAL

CUSTPMER		MATERIAL NO.	FIFIUU9.8-42	REV NO.	A0
PART NAME	COIL	DESCRIPTION	VEUU9.8-470U-V	ISSUE DATE	2022-12-17

1.MECHANICALCIMENSION (UNIT:mm)

2. SCHEMATIC DIAGRAM:

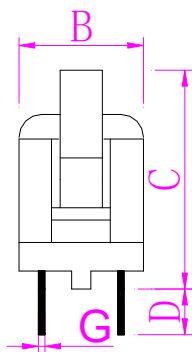

A	B	C	D	E	F	G
16.5MAX	11.5MAX	16.5MAX	3.5±0.5	7.0±0.5	8.0±0.5	0.6±0.2

1. 产品同名端绕制, 铜线不得有破皮等现象;
2. 磁芯规格为:UU9.8 R10K, 用铁夹固定;
3. 线圈需含浸处理;
4. 产品外观尺寸如图所示;
5. 贮存温度范围: -5℃~+30℃, 相对湿度: 20%-75%;
6. 使用温度范围: -40℃~+125℃ (含线圈本身发热)。

3.WINDING :

WINDING	START	FINISH	WIRE (φ)	COLORE	TURNS	REMARK
N1	1	2	2UEW φ 0.55mm*1P		8.0TS (REF)	
N2	4	3	2UEW φ 0.55mm*1P		8.0TS (REF)	

深圳市千代源电子有限公司 SHENZHEN VOLUMESOURCEELECTRONICS CO., LTD.	Approved by	Checked By	Pepered by
			卢永汉

SPECIFICATION FOR APPROVAL

CUSTPMER		MATERIAL NO.	FIFIUU9.8-42	REV NO.	A0
PART NAME	COIL	DESCRIPTION	VEUU9.8-470U-V	ISSUE DATE	2022-12-17
ITEM	SPECIFICATIONS		TEST CONDITION	TEST INSTRUMENT	
1. INDUCTANCE: L: (1-2)&(4-3)	47uH MIN		1KHz/0.25V	UC2836	
2. DCR: R: (1-2)&(4-3)	20mΩ MAX		AT @25℃ @CUT OFF	VR131	
3. IDC: (1-2)&(4-3)	4.0A		≥LOAX70%	VR116/VR7220	
4. HI-POT TEST: PRI-SEC PRI -CORE SEC - CORE	AC2000V 50HZ 1SEC AC500V 50HZ 1SEC AC500V 50HZ 1SEC		CURRENT=0.5mA	VR562	
ITEM	PART	DESCRIPTION	RATING	SUPPLIERS	SGS NO.
1	WIRE	POLYURETHANE WIRE	155℃	PACIFIC ELECTRIC WIRE& CABLE CO., LTD	UL:E164502
2	BOBBIN	PHENOLIC T375J	155℃	CHANG CHUN PLASTICS CO LTD.	N/A
3	CORE	UU9.8 R10K			
4	SOLDER	Sn99.3Cu0.7		BOSHIDA	CANEC080474890 1
5	VARNISH	T4260A TX-111		TAI HU CO., LTD	E228349
6	FLUX	XD-601		SHENZHEN EASTLIGHT CHEMICAL MATERIAL CO., LTD	GZ0908074046/C HEM
深圳市千代源电子有限公司 SHENZHEN VOLUMESOURCEELECTRONICS CO., LTD.			Approved by	Checked By	Prepared by
					卢永汉