



东莞市通科电子有限公司

DongGuan Tongke Electronic Co.,LTD

TL431



SOT-23 Encapsulate Adjustable Reference Source

TL431 Adjustable Accurate Reference Source

FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance ,its typical value is 0.2Ω
- Trapping current capability is 1 to 100mA
- The typical value of the equivalent temperature factor in the whole temperature scope is $50 \text{ ppm}/^\circ\text{C}$
- The effective temperature compensation in the working range of full temperature
- Low output noise voltage
- Fast on -state response

SOT-23

1. REFERENCE



2. CATHODE

3. ANODE

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	SYMBOL	VALUE	UNITS
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	-100-+150	mA
Reference Input Current Range	I_{ref}	0.05-+10	mA
Power Dissipation	P_D	300	mW
Operating temperature	T_{opr}	0-70	°C
Storage temperature Range	T_{stg}	-65-+150 °C	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Reference Input Voltage	V_{ref}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	2.450	2.5	2.550	V	
Deviation of reference input Voltage Over temperature (note)	$\Delta V_{ref}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ $T_{min} \leq T_a \leq T_{max}$		4.5	17	mV	
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	$\Delta V_{ref}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$	ΔV_{KA} $=10\text{V} \sim V_{REF}$		-1.0	-2.7	m V/V
			ΔV_{KA} $=36\text{V} \sim 10\text{V}$		-0.5	-2.0	m V/V
Reference Input Current	I_{ref}	$I_{KA}=10\text{mA}, R_1=10\text{k}\Omega$ $R_2=\infty$		1.5	4	μA	
Deviation Of Reference Input Current Over Full Temperature Range	$\Delta I_{ref}/\Delta T$	$I_{KA}=10\text{mA}, R_1=10\text{k}\Omega$ $R_2=\infty$ $T_a=\text{full Temperature}$		0.4	1.2	μA	
Minimum cathode current for regulation	$I_{KA(min)}$	$V_{KA}=V_{REF}$		0.45	1.0	mA	
Off-state cathode Current	$I_{KA(OFF)}$	$V_{KA}=36\text{V}, V_{REF}=0$		0.05	1.0	μA	
Dynamic Impedance	Z_{KA}	$V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{KHz}$		0.15	0.5	Ω	

Note: $T_{MIN}=0^\circ\text{C}$, $T_{MAX}=+70^\circ\text{C}$

CLASSIFICATION OF V_{ref}

Rank	0.5%	1%	2%
Range	2.487-2.512	2.475-2.525	2.450-2.550



东莞市通科电子有限公司

DongGuan Tongke Electronic Co.,LTD


TL431




SOT-23 Encapsulate Adjustable Reference Source

Typical Characteristics


TL431

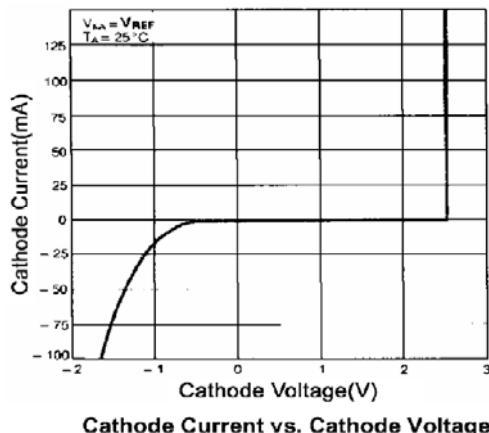


Cathode Current vs. Cathode Voltage

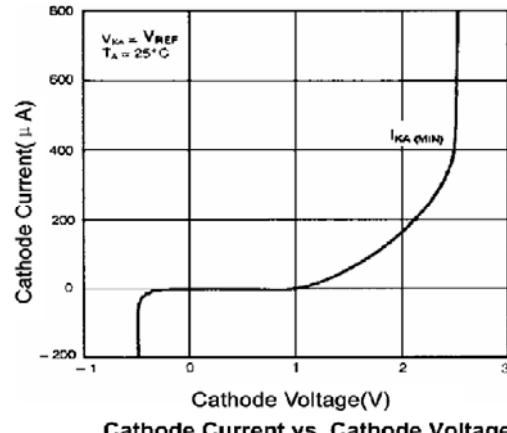


Cathode Current vs. Cathode Voltage

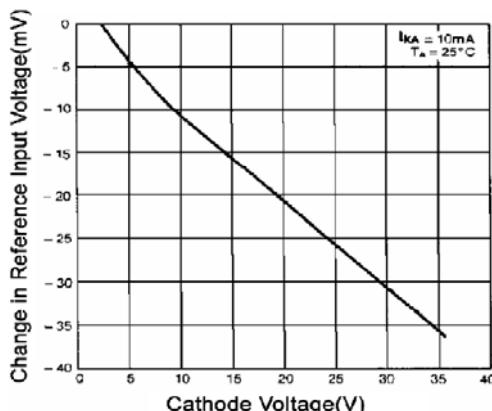


Change in Reference Input Voltage vs. Cathode Voltage

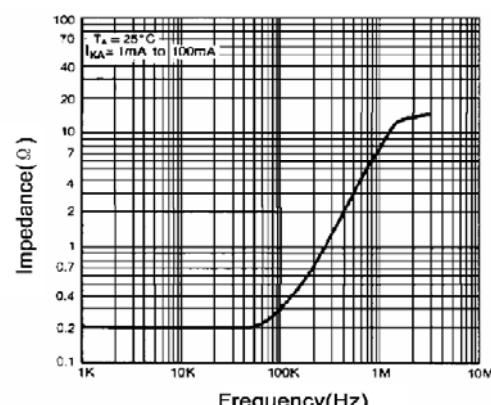

Dynamic Impedance Frequency

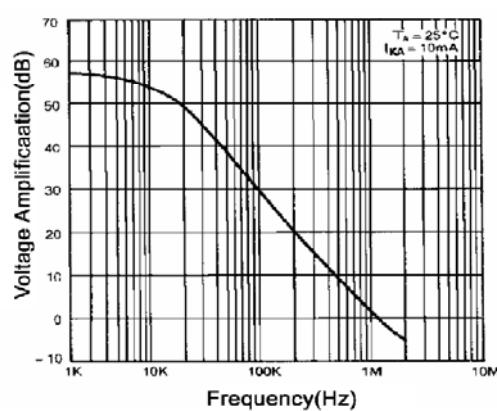

Small Signal Voltage Amplification vs. Frequency

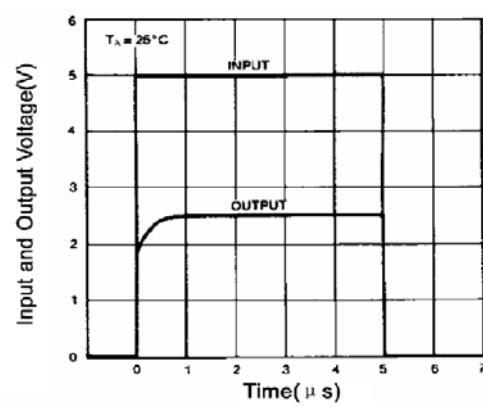

Pulse Response