

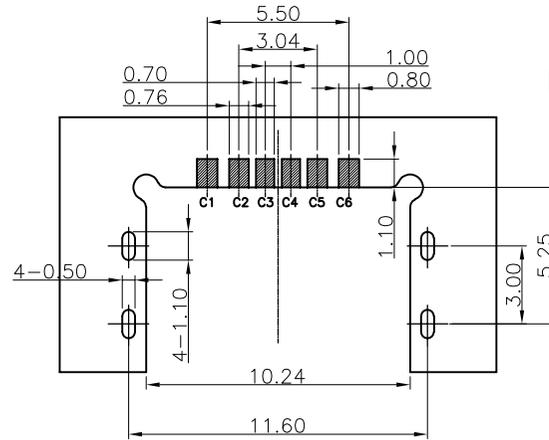


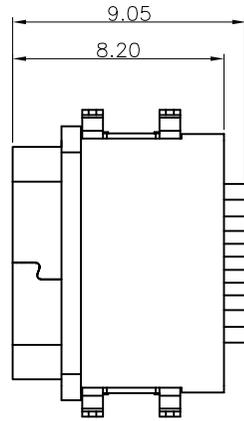

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			







NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

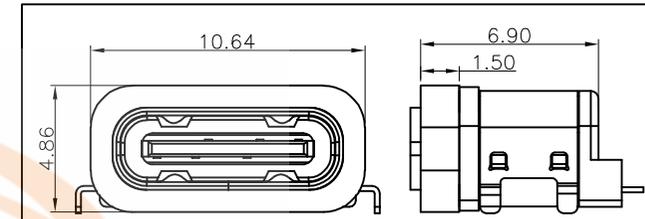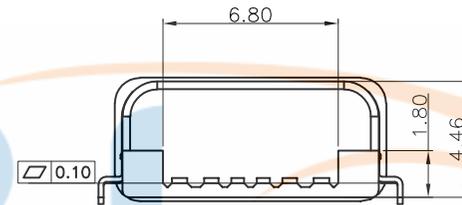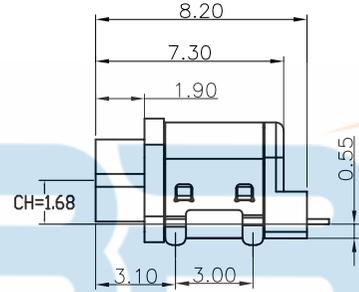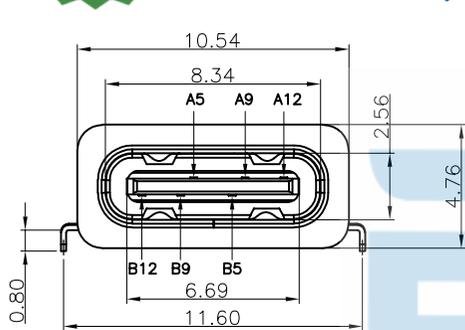

加防水圈示意图

备注:

NO.	料号	备注
1		不带硅胶
2		带硅胶

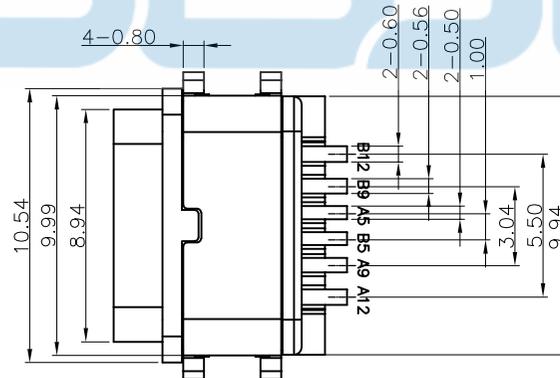

PIN ASSIGNMENT:


PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS




TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	深圳市步步精科技有限公司		
X.X ±0.30	X.* ± 2*	0395-1	TITLE: TYPE-C 6P 母座 防水四脚插沉板0.55 L=8.20 IPX7 CH=1.68		
.XX ±0.20	.X* ± 1*		APPD: LJP		
.XXX ±0.10	.XX* ±0.5*		PART NO. UC.01.53-1J-0005		
UNITS	mm	APPD:	LJP	SCALE	
MATERILA		CHED:	LYX	SHEET	REV.
FINISH		DRAW:	HMY	1:1	1/1 A



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行 (INITIAL EDITION)			

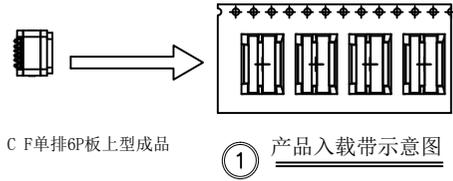


C F单排6P板上型成品

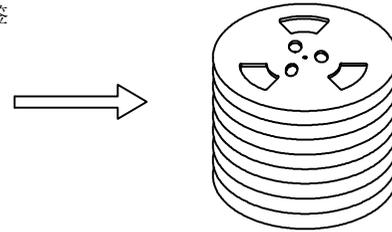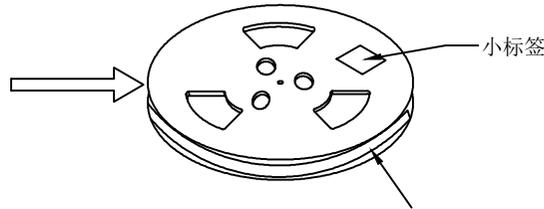

NOTE:

- 1. QUANTITY/REEL: 700 PCS  
数量/卷: 700 PCS  
QUANTITY/INNER CARTON: 700 X 10 = 7000 PCS  
数量/箱: 700 X 10 = 7000 PCS
- 2. FREE 20 CAVE IN THE FRONT CARRIER AND FREE 20 CAVE IN THE END CARRIER.  
包装带内圈空20格, 外圈空20格.



1	成品			
2	CARRIER TAPE	PET	W=24mm T=0.35mm	——
3	COVER TAPE	PET	W=13.3mm T=0.05mm	——
4	小标签		L102mm*W59mm	10
5	卷盘	PS	ø330MM*W28.5MM	10
6	外标签		L102mm*W102mm	1
7	外箱	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY
TOLERANCE		NAME (INTENDED USE) 包装规范		深圳市步步精科技有限公司
X.	±0.20	X.*	± 2°	TITLE: TYPE-C 6P 母座 防水四脚插沉板0.55 L=8.20 IPX7 CI=L.68
.X	±0.15	.X*	± 1°	
.XX	±0.10	.XX*	±0.5°	
UNITS	mm	APPD:	LJP	0395-1
MATERILA		CHED:	LYX	SCALE SHEET REV. NONE 1/1 A
FINISH		DRAW:	HMY	