

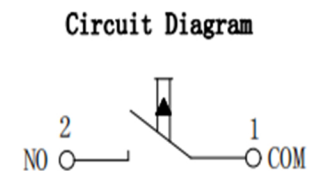


RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

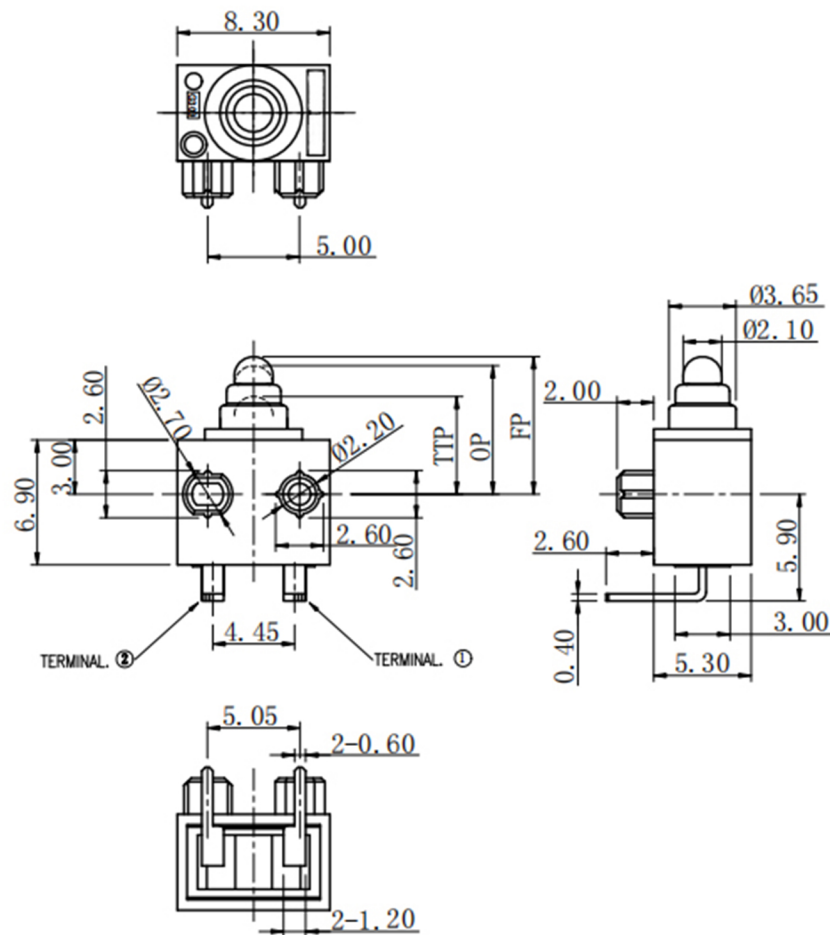

Mounting Hole Dimensions



Printing :

— Date

— Month

— Year

e. g: June 2, 2020

— 200602

CHARACTERISTICS

Operating Force	150gf Max
Release Force	30gf Min
Free Position	7.90mm Max
Operation Position	7.10±0.25mm
Movement-Differential	0.30mm Max
Total Travel Position	5.30mm Max

ELECTRICAL DATA

CONTACT ARRANGEMENT S. P. S. T-NO	SWITCH SEALING IP67
Ratings	
12V DC	0.1A
5V DC	50 μ A

X. ± 0.50		X.° ± 2°		UNITS mm		yiYUAN		深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO.,LTD					
.X ± 0.30		.X° ± 1°		MAT'L 		PART NO.			TITLE:				
.XX ± 0.10		.XX° ± 0.5°				YTD-309-14T			DETECT SWITCH				
.XXX ± 0.05													
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD						FINISH 		APPD: ROGER		DWG NO. : YTD-309-14T			
						Q' TY 		CHKD: ROC					
								DR: BILLY WANG 2020/08/21					SCALE
												1/1	1/1