
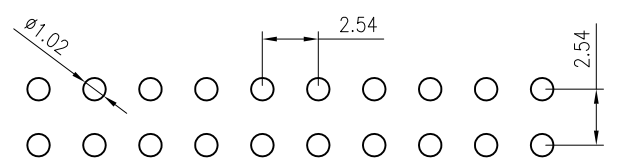
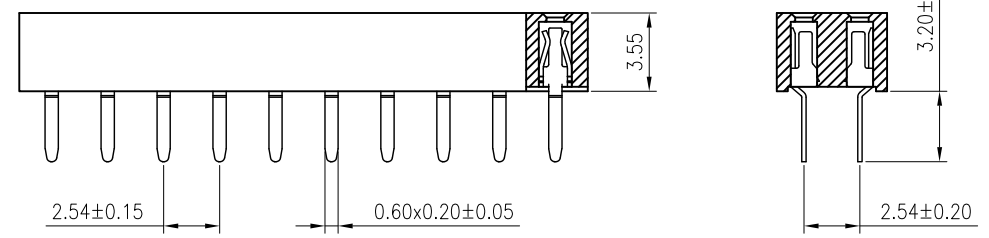


4 3 2 1

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-05-20

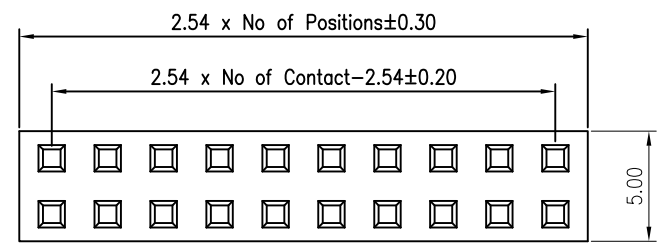

P.C.B LAYOUT

Specification

Material:
 Contact Material: Brass/Phosphor Bronze
 Contact plating: Au or Sn Over 30-50u" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T/PA9T/LCP + 30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤ 20mΩ/contact
 Insulation resistance: ≥ 1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Operating temperature: -40°C to +105°C
 Wave soldering temperature: 255 ± 5°C, 10s

FF02	2XX1	D	XX	X	X	B	N	X	D00
Product Descriptions FF02 H3.55 W5.0	No. of Positions 02-40P	Angle Type D Straight	Contact Plated SN Tin120u" MT 雾锡120u" GF Gold 0.8u" G1 Au1u" G3 Au3u" G4 Au5u" G6 Au10u" G7 Au15u" G8 Au30u" GA Au1.5u" S1 半金锡1u"	Contact Material B Brass P Phosphor Bronze	Insulator Material C PA6T E PA9T F LCP	Insulator Color B Black	Insulator Feature N Without Peg	Packing Options B Tray C PVC Box D Tube	Series No. D00 PC3.2mm

WELL-JET® 深圳市威尔杰电子有限公司
SHENZHEN WEI ER JIE ELECTRONIC CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE:	2016-05-20	双排180度排母 PH2.54 H3.55 U型 PC3.2
X.XXX ±0.10	DRAWN:	SAMTEK	PART NO. FF022XX1DXXXXBNXD00
X.XX ±0.20	CHECKED:		DRAWING NO.
X.X ±0.30	APPROVED:		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			

4 3 2 1